


TECHNICAL SHEET

METAL ROOFING UNI 1 SQ (sound – aqua)

UNI1-SQ

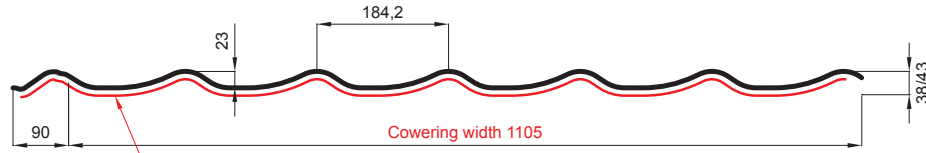

SQ = ANTI-CONDENSING AND ANTI-NOISE FELT th. 3 – 4 mm
 info: SQ (sound, aqua)

L – OPTIMAL LENGTH OF ROOFING FOR MODULE 350 mm




| number of modules | net length | minimum length L | interval for optimal length L | maximum length L |
|-------------------|------------|------------------|-------------------------------|------------------|
| 1 | 350 | 480 | = < L = | 700 |
| 2 | 700 | 830 | = < L = | 1050 |
| 3 | 1050 | 1180 | = < L = | 1400 |
| 4 | 1400 | 1530 | = < L = | 1750 |
| 5 | 1750 | 1880 | = < L = | 2100 |
| 6 | 2100 | 2230 | = < L = | 2450 |
| 7 | 2450 | 2580 | = < L = | 2800 |
| 8 | 2800 | 2930 | = < L = | 3150 |
| 9 | 3150 | 3280 | = < L = | 3500 |
| 10 | 3500 | 3630 | = < L = | 3850 |
| 11 | 3850 | 3980 | = < L = | 4200 |
| 12 | 4200 | 4330 | = < L = | 4550 |
| 13 | 4550 | 4680 | = < L = | 4900 |
| 14 | 4900 | 5030 | = < L = | 5250 |
| 15 | 5250 | 5380 | = < L = | 5600 |
| 16 | 5600 | 5730 | = < L = | 5950 |
| 17 | 5950 | 6080 | = < L = | 6300 |
| 18 | 6300 | 6430 | = < L = | 6650 |
| 19 | 6650 | 6780 | = < L = | 7000 |
| 20 | 7000 | 7130 | = < L = | 7350 |
| 21 | 7350 | 7480 | = < L = | 7700 |
| 22 | 7700 | 7830 | = < L = | 8050 |
| 23 | 8050 | 8180 | = < L = | 8400 |

L – OPTIMAL LENGTH OF ROOFING FOR MODULE 400 mm

| number of modules | net length | minimum length L | interval for optimal length L | maximum length L |
|-------------------|------------|------------------|-------------------------------|------------------|
| 1 | 400 | 530 | = < L = | 800 |
| 2 | 800 | 930 | = < L = | 1200 |
| 3 | 1200 | 1330 | = < L = | 1600 |
| 4 | 1600 | 1730 | = < L = | 2000 |
| 5 | 2000 | 2130 | = < L = | 2400 |
| 6 | 2400 | 2530 | = < L = | 2800 |
| 7 | 2800 | 2930 | = < L = | 3200 |
| 8 | 3200 | 3330 | = < L = | 3600 |
| 9 | 3600 | 3730 | = < L = | 4000 |
| 10 | 4000 | 4130 | = < L = | 4400 |
| 11 | 4400 | 4530 | = < L = | 4800 |
| 12 | 4800 | 4930 | = < L = | 5200 |
| 13 | 5200 | 5330 | = < L = | 5600 |
| 14 | 5600 | 5730 | = < L = | 6000 |
| 15 | 6000 | 6130 | = < L = | 6400 |
| 16 | 6400 | 6530 | = < L = | 6800 |
| 17 | 6800 | 6930 | = < L = | 7200 |
| 18 | 7200 | 7330 | = < L = | 7600 |
| 19 | 7600 | 7730 | = < L = | 8000 |
| 20 | 8000 | 8130 | = < L = | 8400 |

L – optimal length must be at least equal to or greater than the value in the left column of the table for production reasons. The minimum length after cutting the end is 90 mm and the maximum length 360 mm.

L – optimal length must be at least equal to or greater than the value in the left column of the table for production reasons. The minimum length after cutting the end is 90 mm and the maximum length 310 mm.

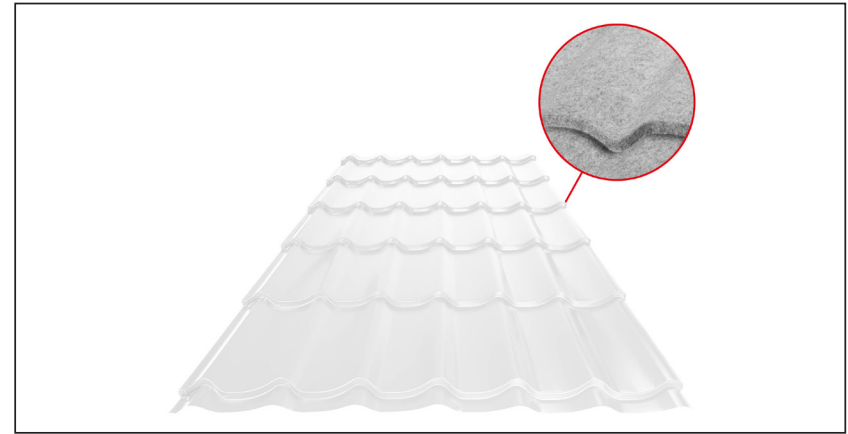

| Technical parameters [mm] | |
|---|-------------------------------|
| Covering width | 1105 |
| Total width | 1195 |
| Metal sheet thickness | 0,50 |
| Profile height (standard / non-standard) | 43 / 38 |
| Shaped rib height (standard / non-standard) | 20 / 15 |
| Module length (standard / non-standard) | 350 / 400 |
| Roof covering length | min. 480 – max. 8400 |
| Weight | approx. 5.0 kg/m ² |
| Folding length when dividing the covering | 130 |



B Galvanized steel prepainted MARCEGAGLIA – Pure white – RAL 9010

| | | | | | |
|--|------|--------------|------------------|--|-----------------|
| INDEX CHANGE | DATE | SIGNATURE | | | |
| | | | | | |
| MATERIAL BRAND | | | | | |
| SIZE, SEMI-FINISHED PRODUCTS | | | | | |
| AUXILIARY EQUIPMENT | | | STN STANDARD | | SORTING NUMBER |
| ELABORATED BY Ing. Kluska M. | | | NOTE | | POSITION NUMBER |
| TESTED BY | | | | | |
| TECHNOLOGIST | | TECHNOLOGIST | OLD DRAWING | | DRAWING NUMBER |
| NAME | | | | | |
| Metal roofing UNI 1 SQ (sound – aqua) | | | Number of sheets | | UNI1-SQ Sheet |

Created: 06.06.2026 07:35:03

Technical changes reserved