
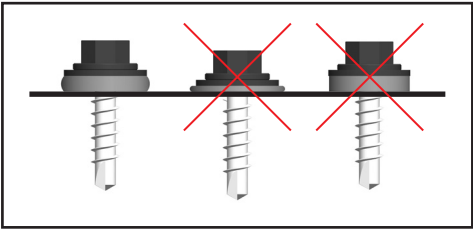


TECHNICAL SHEET

FARMER SCREW GALVANIZED STEEL

UNI-FSK

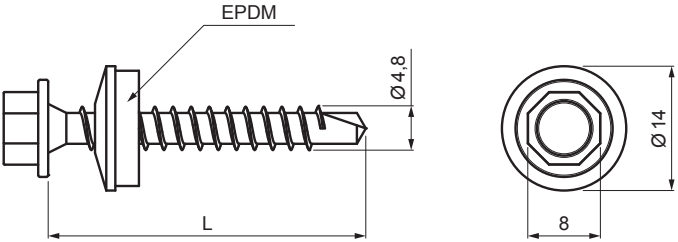


Correct setting of the tightening torque when anchoring the screws:

A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)

B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)

C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

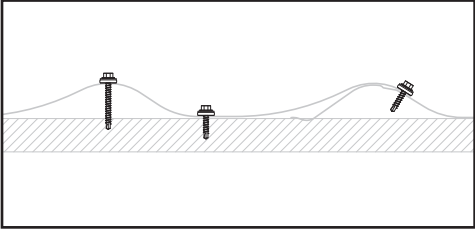

Place of use:

A - use in the upper part of the wave

B - use in the lower part of the metal sheet

C - use for metal sheet - metal sheet connection

Dimensions [mm]	
Nominal dimension	L
4,8x20	20
4,8x35	35
4,8x60	60
4,8x70	70
4,8x80	80



P Galvanized steel – Natur

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY ®	Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT			STN STANDARD		SORTING NUMBER	
ELABORATED BY Ing. Kluska M.			NOTE		POSITION NUMBER	
TESTED BY						
TECHNOLOGIST			OLD DRAWING		DRAWING NUMBER	
NAME			Farmer screw galvanized steel		UNI-FSK	
			Number of sheets		Sheet	

Created: 04.12.2025 04:45:30

Technical changes reserved