
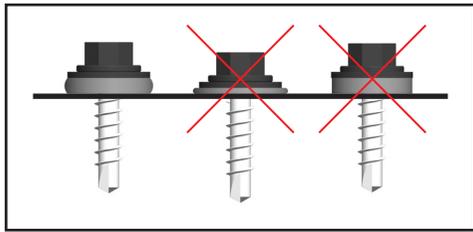



TECHNICAL SHEET

FARMER SCREW GALVANIZED STEEL

UNI-FSK

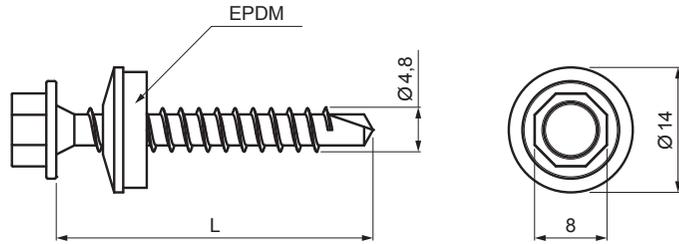

A B C

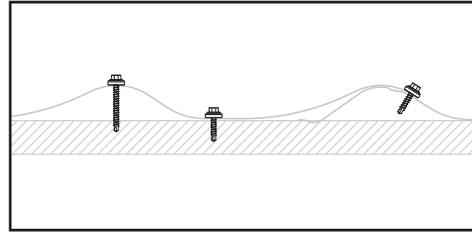

A B C

Correct setting of the tightening torque when anchoring the screws:

- A** - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B** - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C** - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Place of use:

- A** - use in the upper part of the wave
- B** - use in the lower part of the metal sheet
- C** - use for metal sheet - metal sheet connection



P Galvanized steel – Natur

Dimensions [mm]	
Nominal dimension	L
4,8 x 20	20
4,8 x 35	35
4,8 x 60	60
4,8 x 70	70
4,8 x 80	80

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY®	Scan code for 3D model
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME Farmer screw galvanized steel				Number of sheets	UNI-FSK Sheet

Created: 20.04.2026 00:29:43

Technical changes reserved