

## TECHNICAL SHEET

## FARMER SCREW GALVANIZED STEEL

UNI-FSK

A

B

C

D

E

F

A



B

C

D

E

F

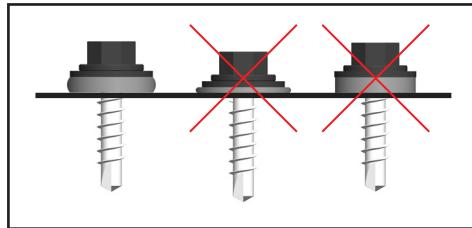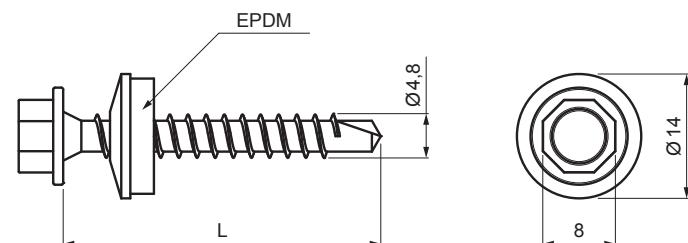


A

B

C

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

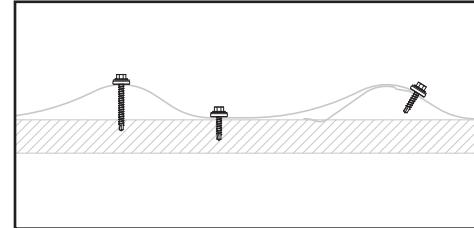

A

B

C

Place of use:

- A - use in the upper part of the wave
- B - use in the lower part of the metal sheet
- C - use for metal sheet - metal sheet connection



AN

Galvanized steel prepainted – Anthracite – RAL 7016

INDEX	CHANGE	DATE	SIGNATURE	KJG	Scan code for 3D model
MATERIAL BRAND	W.C.	WEIGHT kg	SCALE	QUALITY	
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT		STN STANDARD	SORTING NUMBER		
ELABORATED BY Ing. Kluska M.		NOTE	POSITION NUMBER		
TESTED BY		OLD DRAWING	DRAWING NUMBER		
TECHNOLOGIST	TECHNOLOGIST				
NAME	Farmer screw galvanized steel			UNI-FSK	Sheet
		Number of sheets			

Created: 20.01.2026 05:06:27

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
4,8x20	20
4,8x35	35
4,8x60	60