
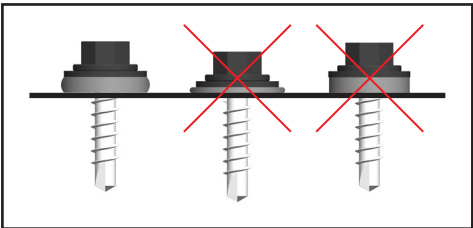


TECHNICAL SHEET

FARMER SCREW GALVANIZED STEEL

UNI-FSK

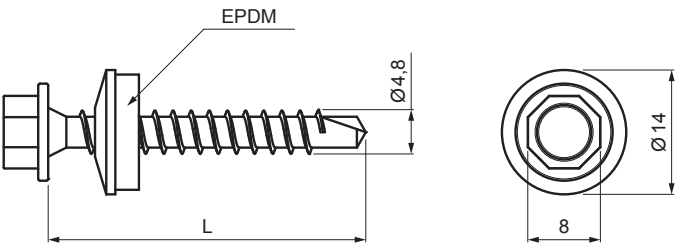


Correct setting of the tightening torque when anchoring the screws:

A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)

B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)

C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

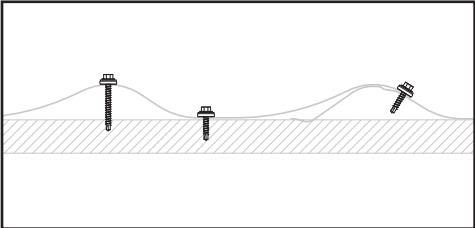

Place of use:

A - use in the upper part of the wave

B - use in the lower part of the metal sheet

C - use for metal sheet - metal sheet connection

Dimensions [mm]	
Nominal dimension	L
4,8x20	20
4,8x35	35
4,8x60	60



OC Galvanized steel prepainted – Steel red – RAL 3009

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY®	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS				STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT				NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.				OLD DRAWING	DRAWING NUMBER
TESTED BY					
TECHNOLOGIST					
NAME			Farmer screw galvanized steel		
			Number of sheets		
			UNI-FSK		
			Sheet		

Created: 04.12.2025 04:44:59

Technical changes reserved