


TECHNICAL SHEET

FARMER SCREW GALVANIZED STEEL

UNI-FSK

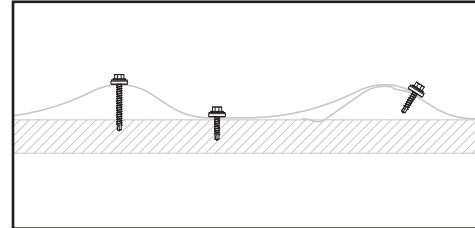

Correct setting of the tightening torque when anchoring the screws:

- A** - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B** - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C** - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Place of use:

- A** - use in the upper part of the wave
- B** - use in the lower part of the metal sheet
- C** - use for metal sheet - metal sheet connection

MH Galvanized steel pre-painted – Copper brown – RAL 8004

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY®	Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS				STN STANDARD	SORTING NUMBER	
AUXILIARY EQUIPMENT				NOTE	POSITION NUMBER	
ELABORATED BY Ing. Kluska M.				OLD DRAWING	DRAWING NUMBER	
TESTED BY						
TECHNOLOGIST			TECHNOLOGIST			
NAME			Farmer screw galvanized steel		Number of sheets	UNI-FSK Sheet

Created: 05.06.2026 02:38:47

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
4,8 x 20	20
4,8 x 35	35
4,8 x 60	60