

TECHNICAL SHEET

FARMER SCREW GALVANIZED STEEL

UNI-FSK

A

B

C

D

E

F

A



B

C

D

E

F

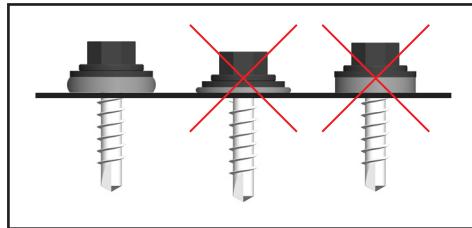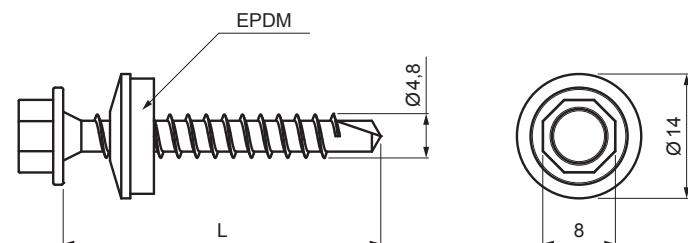


A

B

C

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

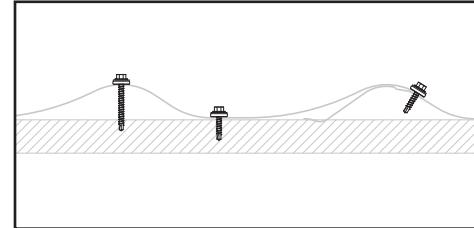

A

B

C

Place of use:

- A - use in the upper part of the wave
- B - use in the lower part of the metal sheet
- C - use for metal sheet - metal sheet connection

Dimensions [mm]	
Nominal dimension	L
4,8x20	20
4,8x35	35
4,8x60	60



BHT Galvanized steel prepainted – Grey aluminium – RAL 9007

INDEX	CHANGE	DATE	SIGNATURE	KJG	QUALITY	Scan code for 3D model
MATERIAL BRAND	W.C.	WEIGHT kg	SCALE			
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT		STN STANDARD	SORTING NUMBER			
ELABORATED BY Ing. Kluska M.		NOTE	POSITION NUMBER			
TESTED BY						
TECHNOLOGIST	TECHNOLOGIST	OLD DRAWING	DRAWING NUMBER			
NAME	Farmer screw galvanized steel			Number of sheets	UNI-FSK	Sheet

Created: 19.01.2026 14:56:50

Technical changes reserved