
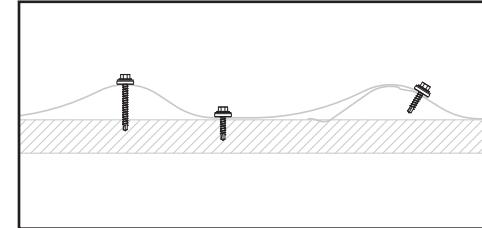
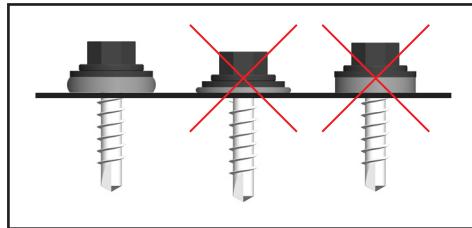


## TECHNICAL SHEET

# FARMER SCREW GALVANIZED STEEL

# UNI-FSK

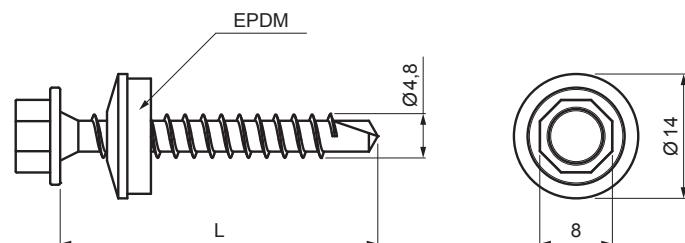

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Dimensions [mm]	
Nominal dimension	L
4,8x20	20
4,8x35	35
4,8x60	60



**MZ** Galvanized steel prepainted – Moss green – RAL 6005

INDEX	CHANGE		DATE	SIGNATURE	 <b>QUALITY</b> 	 Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE		
SIZE, SEMI-FINISHED PRODUCTS							
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER		
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER		
TESTED BY							
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER		
NAME				UNI-FSK			
Farmer screw galvanized steel				Number of sheets	Sheet		

Created: 20.01.2026 04:31:05

Technical changes reserved