


TECHNICAL SHEET

# FARMER SCREW GALVANIZED STEEL

# UNI-FSK

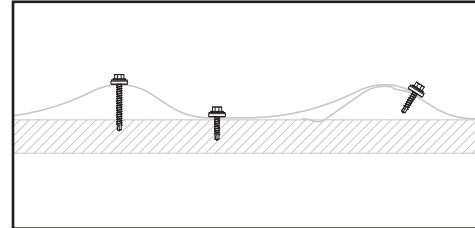

Correct setting of the tightening torque when anchoring the screws:

- A** - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B** - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C** - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Place of use:

- A** - use in the upper part of the wave
- B** - use in the lower part of the metal sheet
- C** - use for metal sheet - metal sheet connection

**SK** Galvanized steel pre-painted – Ivory – RAL 1015

Dimensions [mm]	
Nominal dimension	L
4,8 x 20	20
4,8 x 35	35
4,8 x 60	60

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS				STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT				NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.					
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME			UNI-FSK		
Farmer screw galvanized steel			Number of sheets		Sheet

Created: 07.06.2026 09:54:39

Technical changes reserved