
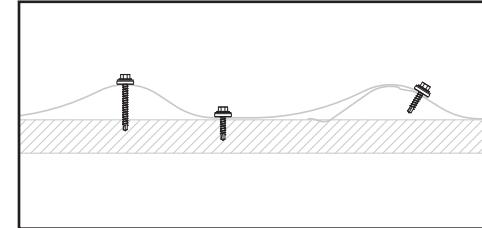
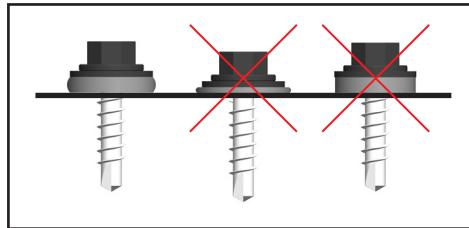


TECHNICAL SHEET

FARMER SCREW GALVANIZED STEEL

UNI-FSK

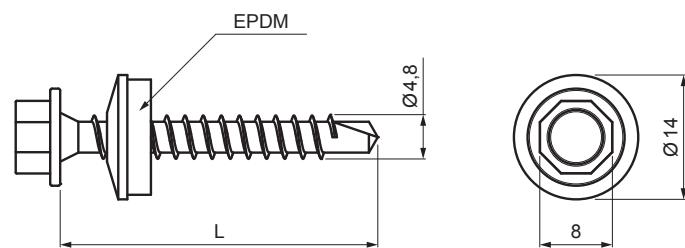

Correct setting of the tightening torque when anchoring the screws.

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Dimensions [mm]	
Nominal dimension	L
4,8x20	20
4,8x35	35
4,8x60	60



SK Galvanized steel prepainted – Ivory – RAL 1015

INDEX	CHANGE	DATE	SIGNATURE	 QUALITY ©	 Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER	
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER	
TESTED BY						
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER	
NAME				Number of sheets UNI-FSK		
Farmer screw galvanized steel						Sheet

Created: 20.01.2026 03:59:56

Technical changes reserved