

## TECHNICAL SHEET

## SELF-DRILLING SCREW GALVANIZED STEEL GT5

UNI-GT 5

A

B

C

D

E

F

A




B

C


D

E

F

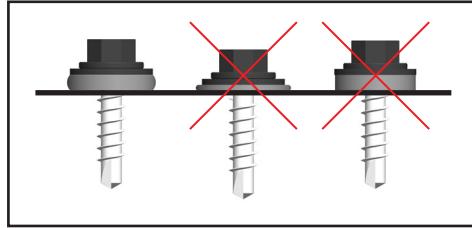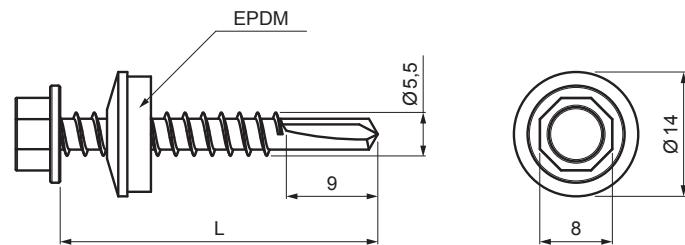

Technical parameters:

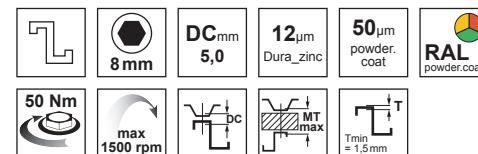

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to thin-walled steel structures

Dimensions [mm]	
Nominal dimension	L
5,5x19	19
5,5x25	25
5,5x32	32



P Galvanized steel – Natur

INDEX	CHANGE	DATE	SIGNATURE	KJG		Scan code for 3D model
MATERIAL BRAND		W.C.	WEIGHT kg	QUALITY		
SIZE, SEMI-FINISHED PRODUCTS		SCALE		STN STANDARD		SORTING NUMBER
AUXILIARY EQUIPMENT				NOTE		POSITION NUMBER
ELABORATED BY	Ing. Kluska M.					
TESTED BY						
TECHNOLOGIST	TECHNOLOGIST			OLD DRAWING		DRAWING NUMBER
NAME	Self-drilling screw galvanized steel GT5		Number of sheets		UNI-GT 5	
					Sheet A	

Created: 19.01.2026 23:35:26

Technical changes reserved