
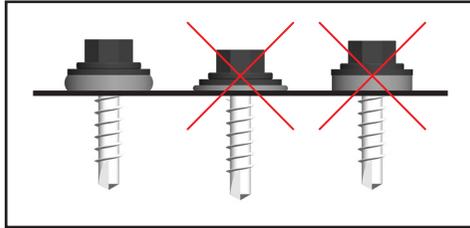
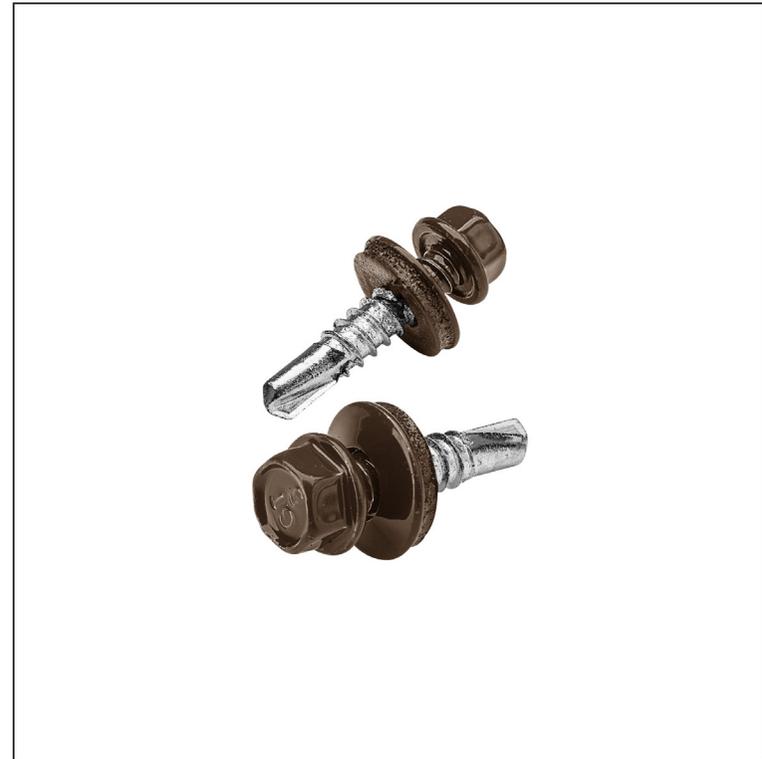



TECHNICAL SHEET

# SELF-DRILLING SCREW GALVANIZED STEEL GT5

# UNI-GT 5

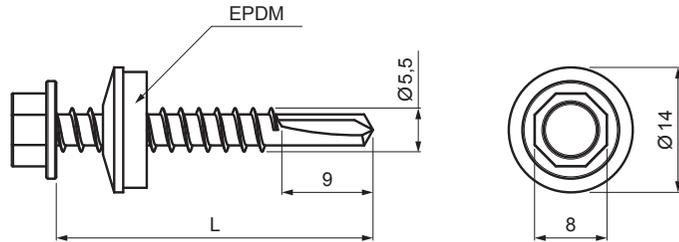

Technical parameters:

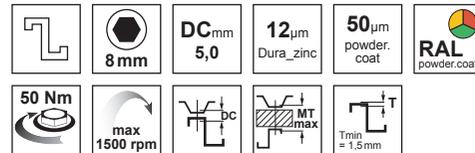

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to thin-walled steel structures

**TM** Galvanized steel prepainted – Testa di Moro – RAL 8028

INDEX	CHANGE	DATE	SIGNATURE	<b>KJG</b> QUALITY®	Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS					STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT					NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.						
TESTED BY						
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER	
NAME Self-drilling screw galvanized steel GT5				Number of sheets	UNI-GT 5	Sheet

Created: 21.04.2026 06:38:05

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
5,5x 19	19
5,5x 25	25
5,5x 32	32