

## TECHNICAL SHEET

## SELF-DRILLING SCREW GALVANIZED STEEL GT5

UNI-GT 5

A

B

C

D

E

F

A



B

C


D

E

F

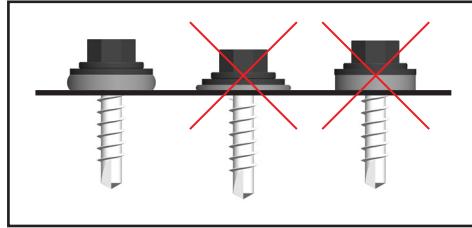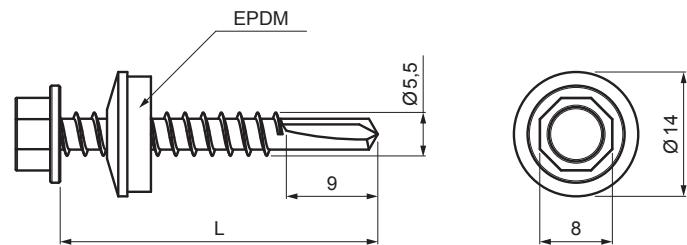

Technical parameters:

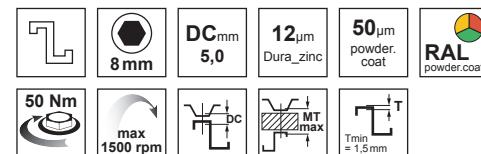

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to thin-walled steel structures

Dimensions [mm]	
Nominal dimension	L
5,5x19	19
5,5x25	25
5,5x32	32



TM Galvanized steel prepainted – Testa di Moro – RAL 8028

INDEX	CHANGE	DATE	SIGNATURE	KJG		Scan code for 3D model
				QUALITY		
MATERIAL BRAND		W.C.	WEIGHT kg	SCALE		
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT			STN STANDARD	SORTING NUMBER		
ELABORATED BY Ing. Kluska M.			NOTE	POSITION NUMBER		
TESTED BY						
TECHNOLOGIST	TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER		
NAME	Self-drilling screw galvanized steel GT5			UNI-GT 5	Sheet	
			Number of sheets			

Created: 20.01.2026 09:54:11

Technical changes reserved