
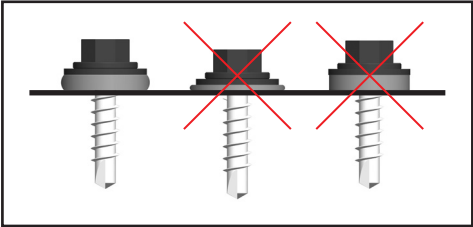


TECHNICAL SHEET

SELF-DRILLING SCREW GALVANIZED STEEL GT5


UNI-GT 5

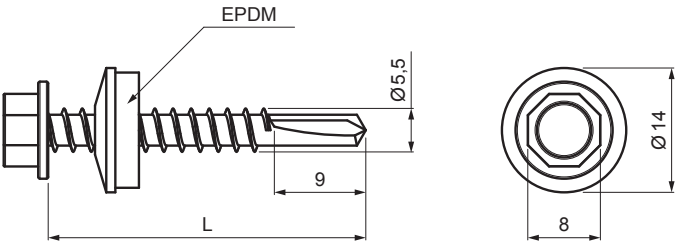

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Technical parameters:

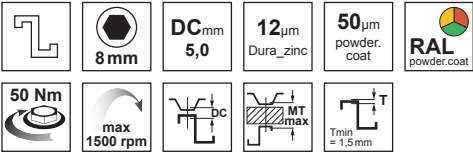

Use:

- self-drilling screws for fixing profiled structural steel sheets to thin-walled steel structures



IC Galvanized steel prepainted – Intense black – RAL 9005

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY®	Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT			STN STANDARD		SORTING NUMBER	
ELABORATED BY Ing. Kluska M.			NOTE		POSITION NUMBER	
TESTED BY						
TECHNOLOGIST		TECHNOLOGIST	OLD DRAWING		DRAWING NUMBER	
NAME			Self-drilling screw galvanized steel GT5		UNI-GT 5	
			Number of sheets		Sheet	

Created: 04.12.2025 04:05:20

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
5,5x19	19
5,5x25	25
5,5x32	32