

TECHNICAL SHEET

SELF-DRILLING SCREW GALVANIZED STEEL GT5

UNI-GT 5

A

B

C

D

E

F

A



B

C


D

E

F

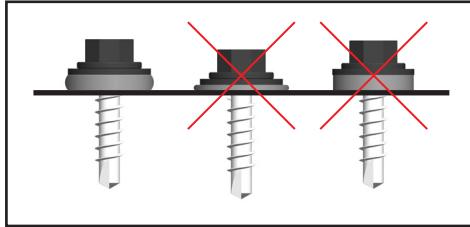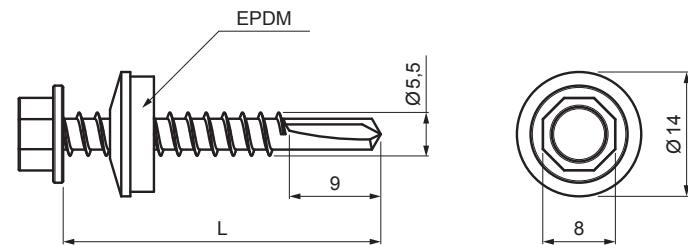

Technical parameters:

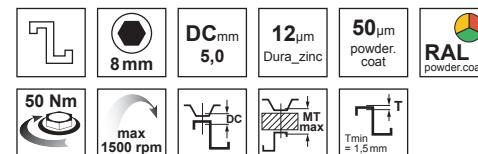

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to thin-walled steel structures

| Dimensions [mm] | |
|-------------------|----|
| Nominal dimension | L |
| 5,5x19 | 19 |
| 5,5x25 | 25 |
| 5,5x32 | 32 |



MH Galvanized steel prepainted – Copper brown – RAL 8004

| | | | | | | |
|------------------------------|--------------|---|--------------|------------------|----------|------------------------|
| INDEX | CHANGE | DATE | SIGNATURE | KJG | | Scan code for 3D model |
| | | | | QUALITY | | |
| MATERIAL BRAND | | W.C. | WEIGHT kg | SCALE | | |
| SIZE, SEMI-FINISHED PRODUCTS | | | | | | |
| AUXILIARY EQUIPMENT | | | STN STANDARD | SORTING NUMBER | | |
| ELABORATED BY Ing. Kluska M. | | | NOTE | POSITION NUMBER | | |
| TESTED BY | | | | | | |
| TECHNOLOGIST | TECHNOLOGIST | | OLD DRAWING | DRAWING NUMBER | | |
| NAME | | Self-drilling screw galvanized steel GT5 | | Number of sheets | UNI-GT 5 | Sheet A |

Created: 19.01.2026 14:55:39

Technical changes reserved