
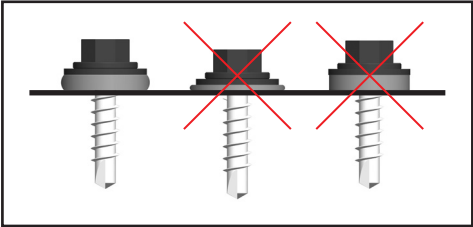


TECHNICAL SHEET

SELF-DRILLING SCREW GALVANIZED STEEL GT5


UNI-GT 5

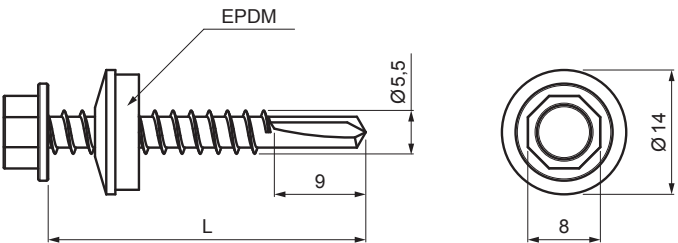

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Technical parameters:

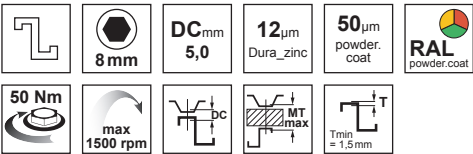

Use:

- self-drilling screws for fixing profiled structural steel sheets to thin-walled steel structures



BH Galvanized steel prepainted – White aluminium – RAL 9006

INDEX	CHANGE	DATE	SIGNATURE	<b>KJG</b> QUALITY®	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT			STN STANDARD SORTING NUMBER		
ELABORATED BY Ing. Kluska M.			NOTE POSITION NUMBER		
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST	OLD DRAWING		DRAWING NUMBER
NAME Self-drilling screw galvanized steel GT5			Number of sheets UNI-GT 5 Sheet		

Created: 04.12.2025 08:22:42

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
5,5x19	19
5,5x25	25
5,5x32	32