
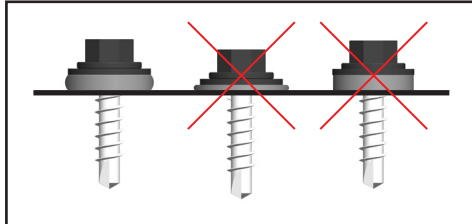


TECHNICAL SHEET

SELF-DRILLING SCREW GALVANIZED STEEL GT5

UNI-GT 5

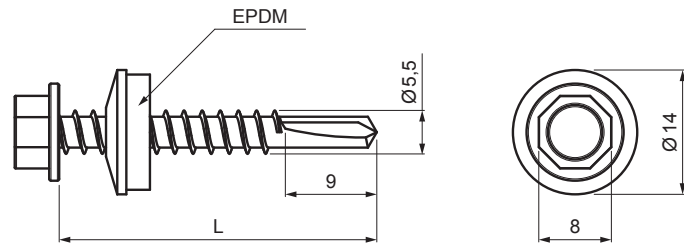

Technical parameters:

	 8 mm	DC mm 5,0	12µm Dura_zinc	50µm powder. coat	
 50 Nm	 max 1500 rpm		 MT max	 T min = 1,5 mm	

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to thin-walled steel structures



Galvanized steel pre-painted – Gentian blue – RAL 5010

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME Self-drilling screw galvanized steel GT5				Number of sheets	UNI-GT 5 Sheet

Created: 06.06.2026 10:59:02

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
5,5x25	25
5,5x32	32