
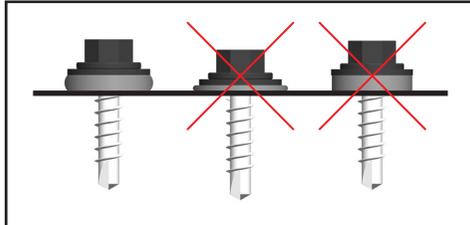


TECHNICAL SHEET

SELF-DRILLING SCREW GALVANIZED STEEL GT5

UNI-GT 5

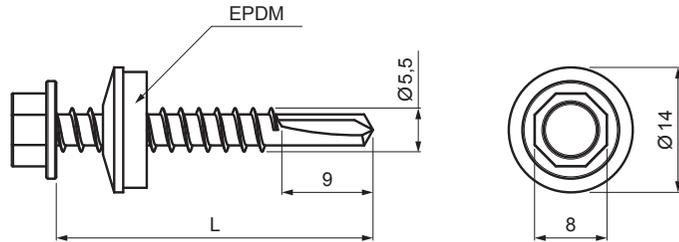

Technical parameters:

	8 mm	DC _{mm} 5,0	12 _{µm} Dura_zinc	50 _{µm} powder.coat	
50 Nm	max 1500 rpm				T _{min} = 1,5 mm

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to thin-walled steel structures

MOT Galvanized steel pre-painted – Gentian blue – RAL 5010

Dimensions [mm]	
Nominal dimension	L
5,5 x 25	25
5,5 x 32	32

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY®	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME Self-drilling screw galvanized steel GT5				Number of sheets	UNI-GT 5 Sheet

Created: 21.04.2026 17:18:02

Technical changes reserved