
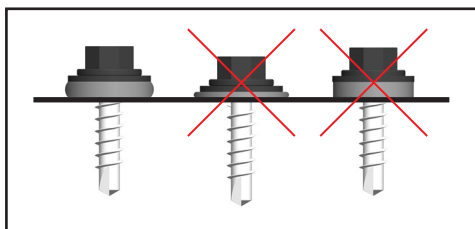


# TECHNICAL SHEET


## SELF-DRILLING SCREW GALVANIZED STEEL GT5

## UNI-GT 5

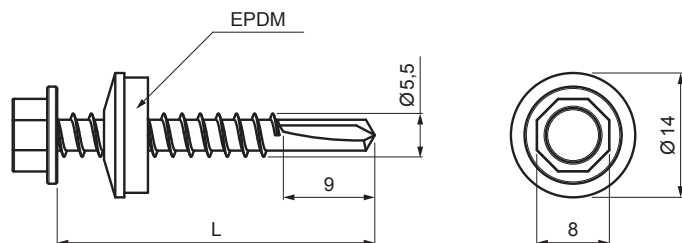

A B C

Technical parameters:

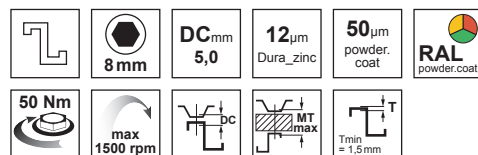

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to thin-walled steel structures



**B** Galvanized steel prepainted – Pure white – RAL 9010

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS				STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT				NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.				OLD DRAWING	DRAWING NUMBER
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST			
NAME			UNI-GT 5		
Self-drilling screw galvanized steel GT5			Number of sheets		Sheet

Created: 04.12.2025 10:01:36

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
5,5x 19	19
5,5x 25	25
5,5x 32	32