
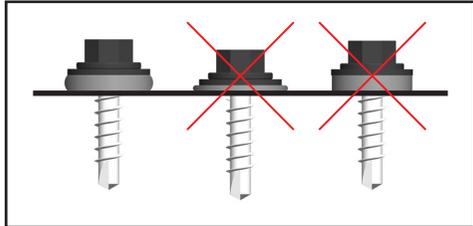



TECHNICAL SHEET

# SELF-DRILLING SCREW GALVANIZED STEEL GT12

# UNI-GT12

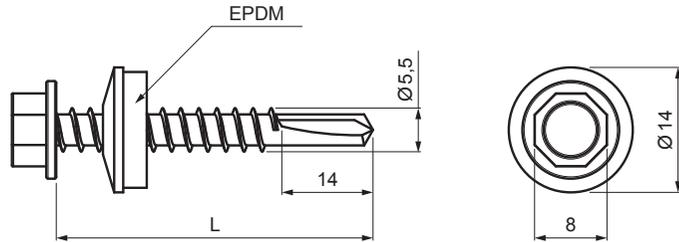

Technical parameters:

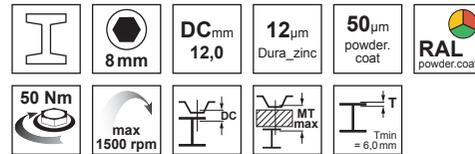

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Použitie:

- samovrtné skrutky pre upevnenie profilovaných konštrukčných ocelových plechov na ocelové konštrukcie valcované za tepla

**P** Galvanized steel – Natur

INDEX	CHANGE	DATE	SIGNATURE	<b>KJG</b> QUALITY®	Scan code for 3D model
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME Self-drilling screw galvanized steel GT12				Number of sheets	UNI-GT12 Sheet

Created: 22.04.2026 15:37:26

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
5,5x35	35