
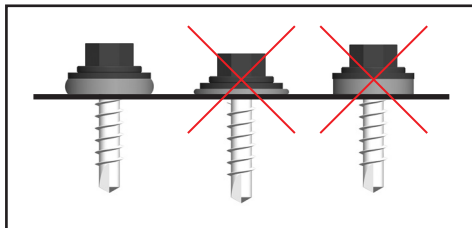


TECHNICAL SHEET

SELF-DRILLING SCREW GALVANIZED STEEL GT12

UNI-GT12

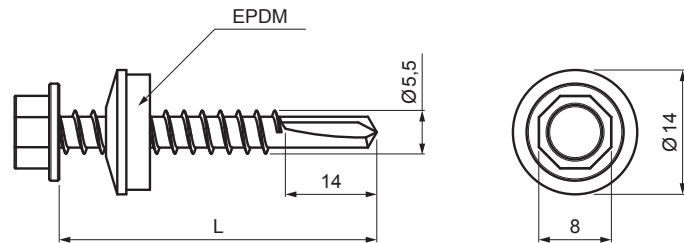

Technical parameters:

		DC_{mm} 12,0	12 _{µm} Dura_zinc	50 _{µm} powder. coat	

OC Galvanized steel pre-painted – Steel red – RAL 3009

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to hot-rolled steel structures

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY®	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME Self-drilling screw galvanized steel GT12				Number of sheets	UNI-GT12 Sheet

Created: 21.04.2026 21:51:17

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
5,5x35	35