

TECHNICAL SHEET

SELF-DRILLING SCREW GALVANIZED STEEL GT12

UNI-GT12

A

B

C

D

E

F

A




B

C


D

E

F

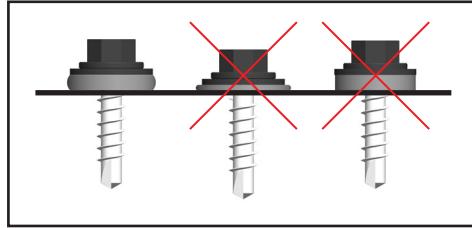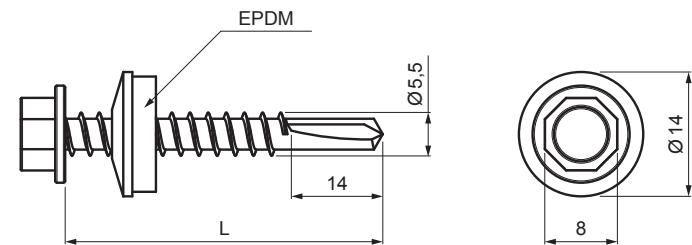

Technical parameters:

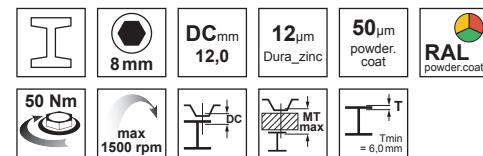

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to hot-rolled steel structures



BH Galvanized steel prepainted – White aluminium – RAL 9006

INDEX	CHANGE	DATE	SIGNATURE	KJG		Scan code for 3D model
MATERIAL BRAND		W.C.	WEIGHT kg	QUALITY		
SIZE, SEMI-FINISHED PRODUCTS		STN STANDARD		SORTING NUMBER		
AUXILIARY EQUIPMENT		NOTE		POSITION NUMBER		
ELABORATED BY Ing. Kluska M.		TECHNOLOGIST		OLD DRAWING		DRAWING NUMBER
TESTED BY		TECHNOLOGIST		UNI-GT12		Sheet
TECHNOLOGIST		NAME		Number of sheets		
		Self-drilling screw galvanized steel GT12				

Created: 19.01.2026 14:58:01

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
5,5 x 35	35