
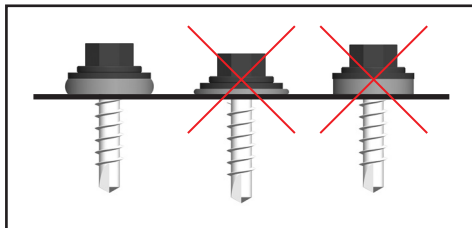


TECHNICAL SHEET

# SELF-DRILLING SCREW GALVANIZED STEEL GT12

# UNI-GT12

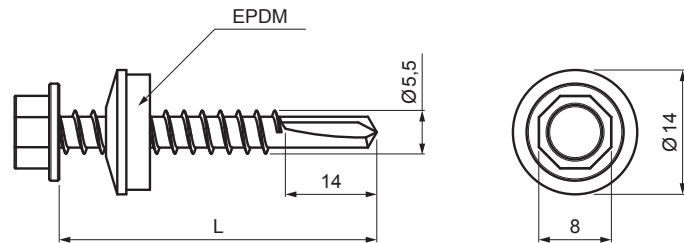

Technical parameters:

	8 mm	DC <sub>mm</sub> 12,0	12 <sub>µm</sub> Dura_zinc	50 <sub>µm</sub> powder. coat	
50 Nm	max 1500 rpm	DC	MT max	T T <sub>min</sub> = 6,0 mm	

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to hot-rolled steel structures

**PS** Galvanized steel prepainted – Dusty grey – RAL 7037

Dimensions [mm]	
Nominal dimension	L
5,5x35	35

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME Self-drilling screw galvanized steel GT12				Number of sheets	UNI-GT12 Sheet

Created: 05.06.2026 05:33:33

Technical changes reserved