
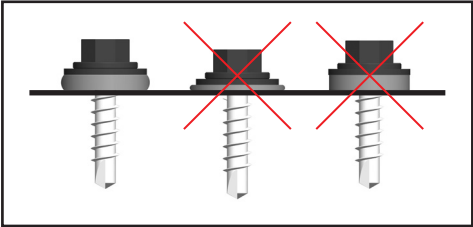


TECHNICAL SHEET

SELF-DRILLING SCREW GALVANIZED STEEL


UNI-GT 12

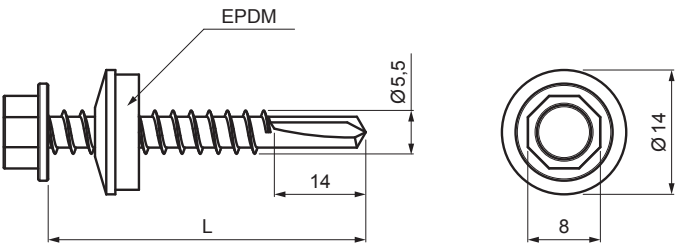

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Technical parameters:

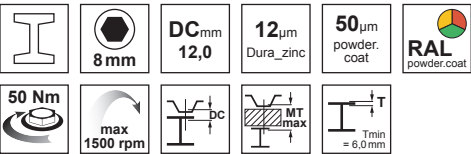

Use:

- self-drilling screws for fixing profiled structural steel sheets to hot-rolled steel structures



**MZ** Galvanized steel prepainted – Moss green – RAL 6005

INDEX	CHANGE	DATE	SIGNATURE	<b>KJG</b> QUALITY ®	Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT			STN STANDARD		SORTING NUMBER	
ELABORATED BY Ing. Kluska M.			NOTE		POSITION NUMBER	
TESTED BY						
TECHNOLOGIST			TECHNOLOGIST	OLD DRAWING	DRAWING NUMBER	
NAME			Self-drilling screw galvanized steel		UNI-GT 12	
			Number of sheets		Sheet	

Created: 04.12.2025 04:05:24

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
5,5x35	35