

TECHNICAL SHEET

SELF-DRILLING SCREW GALVANIZED STEEL GT12

UNI-GT12

A

B

C

D

E

F

A




B

C


D

E

F

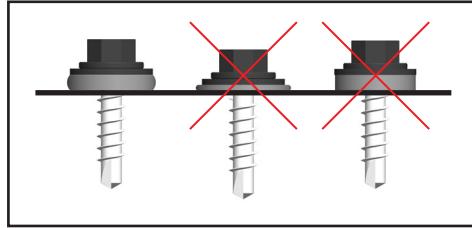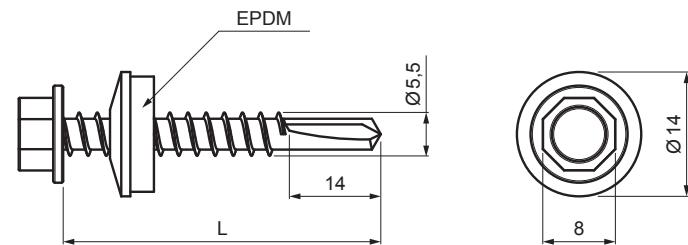

Technical parameters:

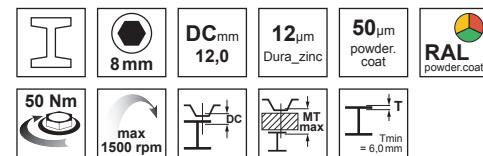

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Use:

- self-drilling screws for fixing profiled structural steel sheets to hot-rolled steel structures



B Galvanized steel prepainted – Pure white – RAL 9010

INDEX	CHANGE	DATE	SIGNATURE	 Scan code for 3D model	
MATERIAL BRAND		W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT			STN STANDARD	SORTING NUMBER	
ELABORATED BY Ing. Kluska M.			NOTE	POSITION NUMBER	
TESTED BY					
TECHNOLOGIST	TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER	
NAME		Self-drilling screw galvanized steel GT12		Number of sheets	UNI-GT12
					Sheet A

Created: 19.01.2026 21:54:21

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
5,5 x 35	35