
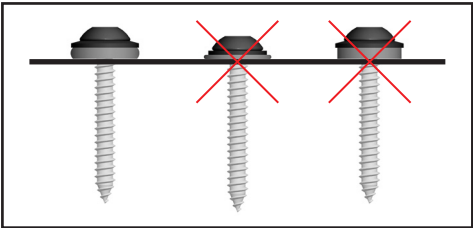


TECHNICAL SHEET

SELF-TAPPING SREW STAINLESS STEEL

W-UNI NSZ

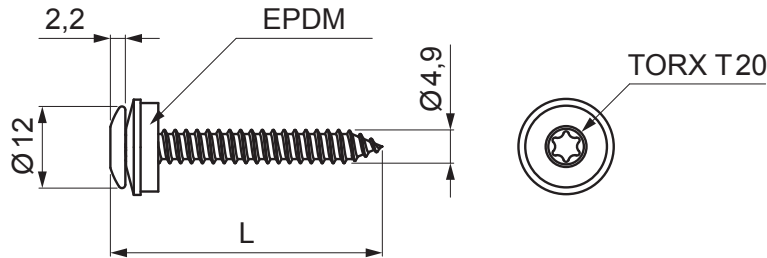

Correct setting of the tightening torque when anchoring the screws:

A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)

B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)

C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

EJOT® thread-forming screw JA3-LT-4,9xL-E14 with mushroom head

Field of application:

- fixing metal profiles to wooden or aluminium support structures ≤ 2 mm

Features:

- Stainless steel A2
- glossy or painted mushroom head with sealing washer
- sealing washer made of stainless steel
- pre-mounted sealing washer

Technical parameters:

- internal tightening extension piece T20



N Stainless steel A2/A2

Dimensions [mm]	
Nominal dimension	L
4,9x25	25
4,9x35	35
4,9x38	38
4,9x64	64

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY®	Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER	
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER	
TESTED BY						
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER	
NAME			Self-tapping srew stainless steel		Number of sheets	
					W-UNI NSZ	
					Sheet	