
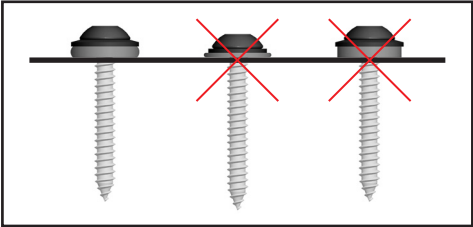


TECHNICAL SHEET

SELF-TAPPING SREW STAINLESS STEEL

W-UNI NSZ

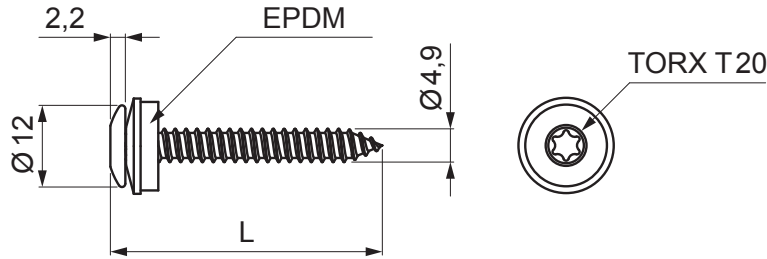

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

- EJOT® thread-forming screw JA3-LT-4,9xL-E14 with mushroom head
- Field of application:
- fixing metal profiles to wooden or aluminium support structures ≤ 2 mm
- Features:
- Stainless steel A2
 - glossy or painted mushroom head with sealing washer
 - sealing washer made of stainless steel
 - pre-mounted sealing washer
- Technical parameters:
- internal tightening extension piece T20



TM Stainless steel pre-painted A2/A2 – Testa di Moro – RAL 8028

Dimensions [mm]	
Nominal dimension	L
4,9x25	25
4,9x38	38
4,9x64	64

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY®	Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER	
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER	
TESTED BY						
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER	
NAME						
Self-tapping srew stainless steel				Number of sheets	W-UNI NSZ	
					Sheet	