
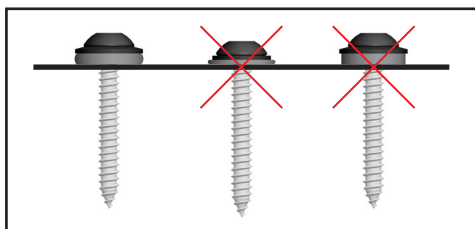


TECHNICAL SHEET

SELF-TAPPING SREW STAINLESS STEEL

W-UNI NSZ

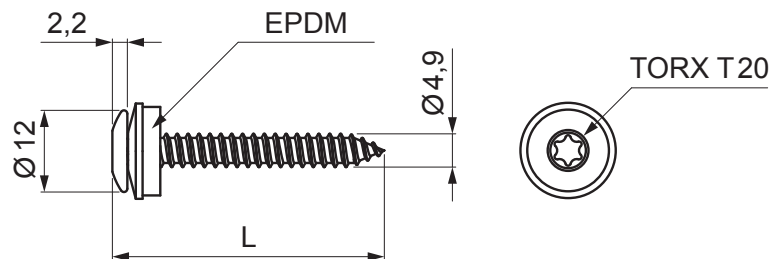

Correct setting of the tightening torque when anchoring the screws:

- A** - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B** - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C** - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

EJOT® thread-forming screw JA3-LT-4,9xL-E14 with mushroom head

Field of application:

- fixing metal profiles to wooden or aluminium support structures ≤ 2 mm

Features:

- Stainless steel A2
- glossy or painted mushroom head with sealing washer
- sealing washer made of stainless steel
- pre-mounted sealing washer

Technical parameters:

- internal tightening extension piece T20



Stainless steel prepainted A2/A2 – Testa di Moro – RAL 8028

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS				STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT				NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.				OLD DRAWING	DRAWING NUMBER
TESTED BY					
TECHNOLOGIST			TECHNOLOGIST		
NAME			Self-tapping srew stainless steel		
			Number of sheets		
			W-UNI NSZ		
			Sheet		

Created: 20.01.2026 03:59:53

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
4,9x25	25
4,9x38	38
4,9x64	64