
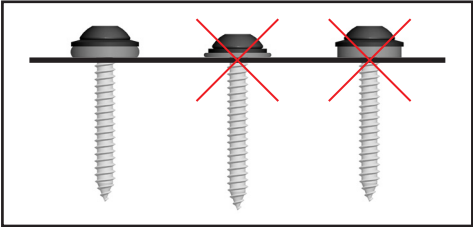


TECHNICAL SHEET

SELF-TAPPING SREW STAINLESS STEEL

W-UNI NSZ

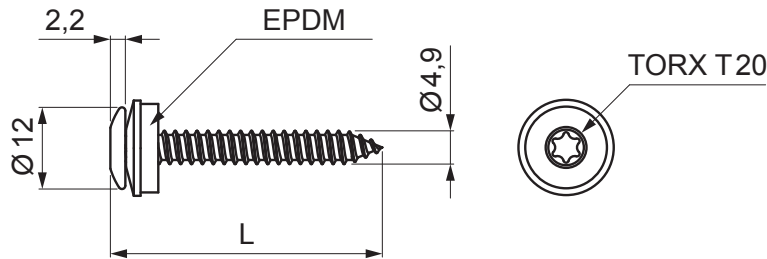

- Correct setting of the tightening torque when anchoring the screws:
- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
 - B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
 - C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Dimensions [mm]	
Nominal dimension	L
4,9x25	25
4,9x38	38
4,9x64	64

- EJOT® thread-forming screw JA3-LT-4,9xL-E14 with mushroom head
- Field of application:
- fixing metal profiles to wooden or aluminium support structures ≤ 2 mm
- Features:
- Stainless steel A2
 - glossy or painted mushroom head with sealing washer
 - sealing washer made of stainless steel
 - pre-mounted sealing washer
- Technical parameters:
- internal tightening extension piece T20



IC Stainless steel pre-painted A2/A2 – Intense black – RAL 9005

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS				STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT				NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.				OLD DRAWING	DRAWING NUMBER
TESTED BY					
TECHNOLOGIST					
NAME			Self-tapping srew stainless steel		
			Number of sheets		
			W-UNI NSZ		
			Sheet		