
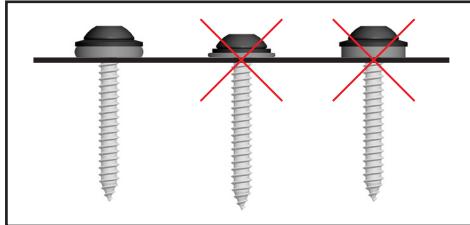



## TECHNICAL SHEET

## SELF-TAPPING SCREW STAINLESS STEEL

W-UNI NSZ

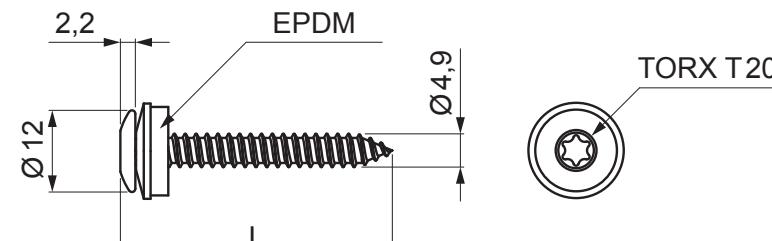

Correct setting of the tightening torque when anchoring the screws:

- A - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

## Dimensions [mm]

Nominal dimension	L
4,9x25	25
4,9x38	38
4,9x64	64



EJOT® thread-forming screw JA3-LT-4,9xL-E14 with mushroom head

## Field of application:

- fixing metal profiles to wooden or aluminium support structures  $\leq 2$  mm

## Features:

- Stainless steel A2
- glossy or painted mushroom head with sealing washer
- sealing washer made of stainless steel
- pre-mounted sealing washer

## Technical parameters:

- internal tightening extension piece T20

IC

Stainless steel prepainted A2/A2 – Intense black – RAL 9005

INDEX	CHANGE	DATE	SIGNATURE	KJG		Scan code for 3D model
MATERIAL BRAND		W.C.	WEIGHT kg	QUALITY		
SIZE, SEMI-FINISHED PRODUCTS		SCALE				
AUXILIARY EQUIPMENT		STN STANDARD		SORTING NUMBER		
ELABORATED BY Ing. Kluska M.		NOTE		POSITION NUMBER		
TESTED BY	TECHNOLOGIST	OLD DRAWING		DRAWING NUMBER		
NAME	Self-tapping screw stainless steel		W-UNI NSZ		Sheet	
	Number of sheets					

Created: 19.01.2026 14:56:27

Technical changes reserved