


TECHNICAL SHEET

GROOVE SEALING STRIP KJG FALZ

FALZ-NILL TP 600

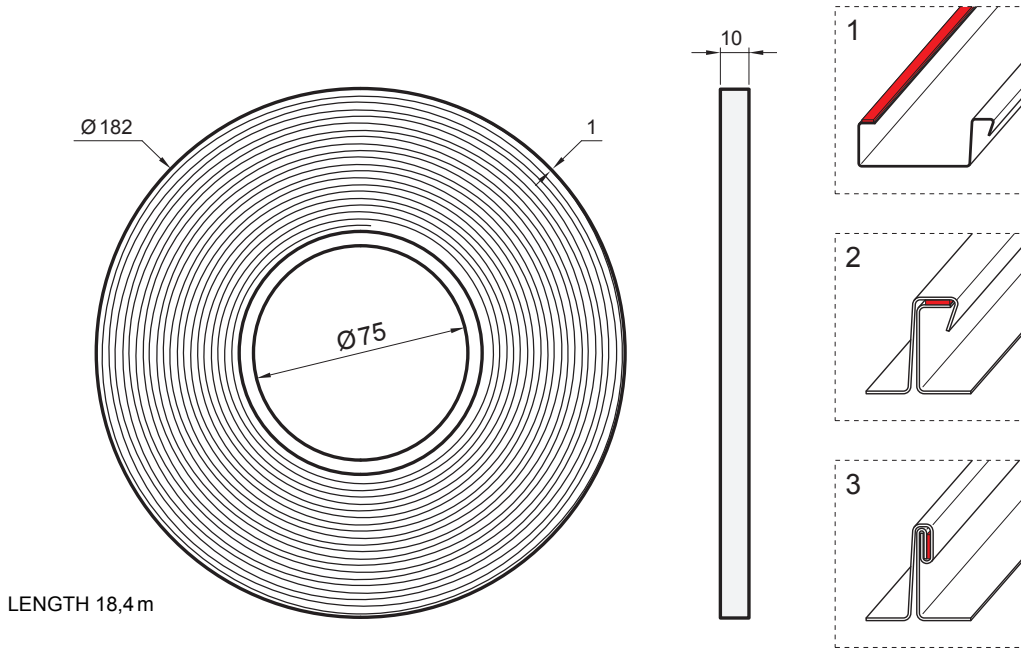

LENGTH 18,4 m

USE:
- the sealing strip is used in the folds on the KJG folded covering against the passage of driven rainwater

Use a sealing strip in the folds on the KJG folded covering against the passage of driven rainwater

Technical properties		
Properties	Standard	Classification
Flammability class	DIN 4102	B1, hardly flammable, P-NDS04-229
Thermal conductivity	DIN 52 612	$\lambda_{10} \leq 0,048 \text{ W/m} \cdot \text{k}$
Diffusion resistance coefficient	EN ISO 121 572	$\mu \leq 100$
Thermal resistance	–	-30 °C to +90 °C
Gap air permeability	EN 1026	$a \leq 0,1 \text{ m}^3 / [\text{h} \cdot \text{m} \cdot (\text{daPa})\text{n}]$
Resistance to weather conditions	DIN 18 542	complies with requirements
Water-leak tightness	EN 1027	600 - 1150 Pa
Compatibility with building materials	DIN 18 542	secured according to BG1, for the product with solvents, perform the compatibility test
Application temperature	–	without limitation
Storage period	–	24 months
Storage temperature	–	+1 °C to +20 °C



AN Polyurethane – Anthracite – RAL 7016

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY ®	Scan code for 3D model	QR CODE
MATERIAL BRAND				W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER	
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER	
TESTED BY						
TECHNOLOGIST				OLD DRAWING	DRAWING NUMBER	
NAME						
Groove sealing strip KJG FALZ				Number of sheets	FALZ-NILL TP 600 Sheet	

Created: 04.12.2025 04:45:07

Technical changes reserved