


TECHNICAL SHEET

# FARMER SCREW GALVANIZED STEEL

# UNI-FSK

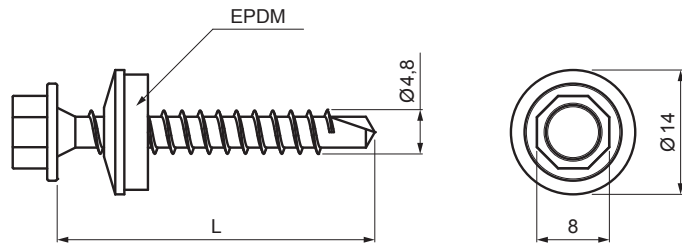

Correct setting of the tightening torque when anchoring the screws:

- A** - correctly set tightening torque (flat washer, compressed seal - slightly rounded around the circumference)
- B** - high tightening torque (EPDM seal excessively deformed, possibility of cracking and subsequent loss of tightness)
- C** - small tightening torque (washer with EPDM seal does not have sufficient sealing ability)

Place of use:

- A** - use in the upper part of the wave
- B** - use in the lower part of the metal sheet
- C** - use for metal sheet - metal sheet connection

**TH** Galvanized steel pre-painted – Dark brown ČOKO – RAL 8017

INDEX	CHANGE	DATE	SIGNATURE	<b>KJG</b> QUALITY®	Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS					STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT					NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.						
TESTED BY						
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER	
NAME Farmer screw galvanized steel				Number of sheets	UNI-FSK Sheet	

Created: 06.06.2026 02:53:43

Technical changes reserved

Dimensions [mm]	
Nominal dimension	L
4,8 x 20	20
4,8 x 35	35
4,8 x 60	60