


TECHNICAL SHEET


ROOF MEMBRANE DELUXE 250 g  
ADHESIVE TAPE

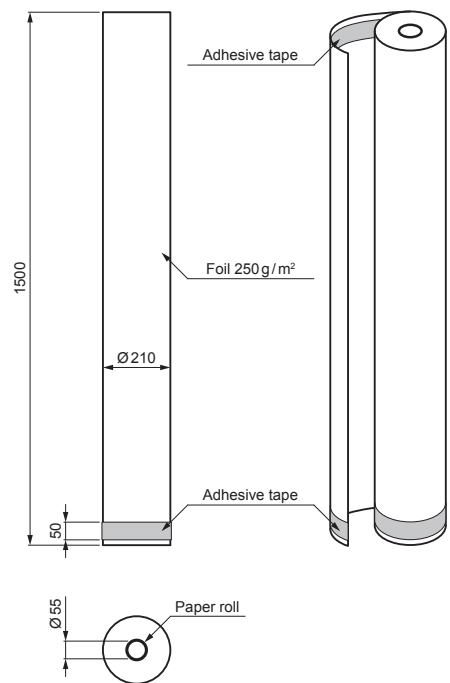

Technical parameter	
Roll dimensions	1,5 m x 30 l.m. = 45 m²
Area weight	c.a. 250 g/m²
Reaction to fire	E
Vapour permeability	2500 g/m²/24 hod.
Resistance to UV radiation	4 months *
Weight	11,25 kg

\* UV stabilization even up to 4 months according to artificial aging carried out in the laboratory relating to the conditions of average sun exposure for the climate of Central Europe

SD-EUV FOLIA 250GLP

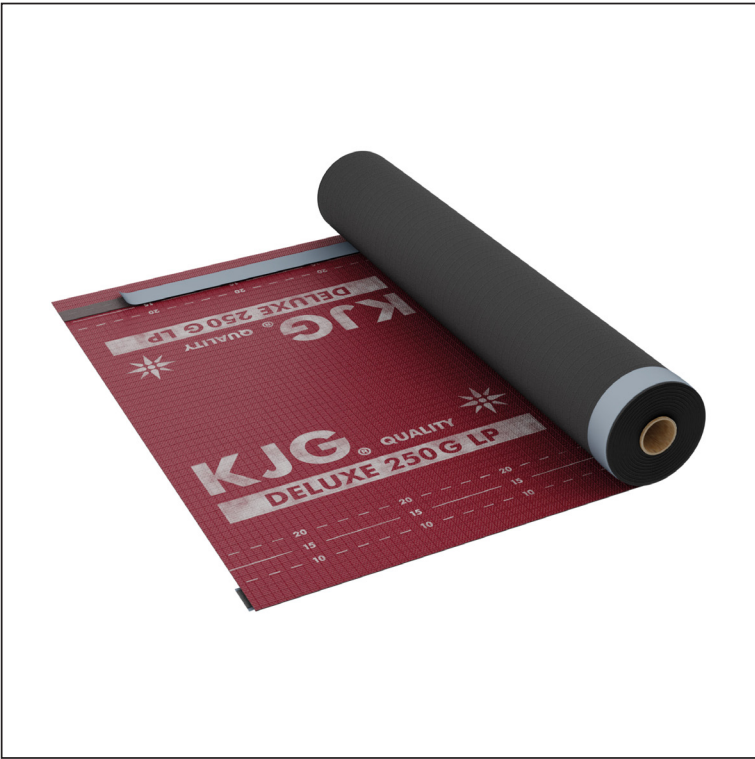

Foil : Polypropylene – laminate  
Mesh: Polyethylene

INDEX	CHANGE	DATE	SIGNATURE	<b>KJG</b> QUALITY ®	Scan code for 3D model	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT			STN STANDARD		SORTING NUMBER	
ELABORATED BY Ing. Kluska M.			NOTE		POSITION NUMBER	
TESTED BY						
TECHNOLOGIST		TECHNOLOGIST	OLD DRAWING		DRAWING NUMBER	
NAME Roof membrane DELUXE 250 g adhesive tape			Number of sheets		SD-EUV FOLIA 250GLP Sheet	

Created: 04.12.2025 07:59:07

Technical changes reserved