


TECHNICAL SHEET

ROOF MEMBRANE DELUXE 250 g ADHESIVE TAPE



SD-EUV FOLIA 250GLP

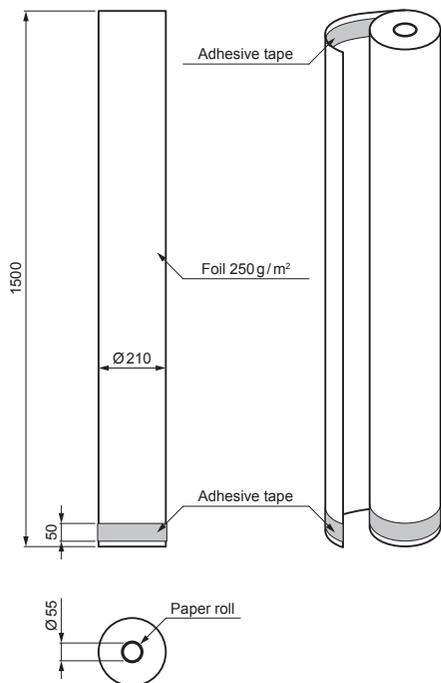

Foil : Polypropylene – laminate
Mesh: Polyethylene

Technical parameter	
Roll dimensions	1,5 m x 30 l.m. = 45 m ²
Area weight	c.a. 250 g/m ²
Reaction to fire	E
Vapour permeability	2500 g/m ² /24 hod.
Resistance to UV radiation	4 months *
Weight	11,25 kg

* UV stabilization even up to 4 months according to artificial aging carried out in the laboratory relating to the conditions of average sun exposure for the climate of Central Europe

INDEX	CHANGE	DATE	SIGNATURE	KJG QUALITY®	Scan code for 3D model
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME Roof membrane DELUXE 250 g adhesive tape				Number of sheets	SD-EUV FOLIA 250GLP Sheet

Created: 19.04.2026 15:19:47

Technical changes reserved