



TECHNICAL SHEET


ROOF MEMBRANE METALDREN 450 g ADHESIVE TAPE

SD-EUV FOLIA 450GLPM

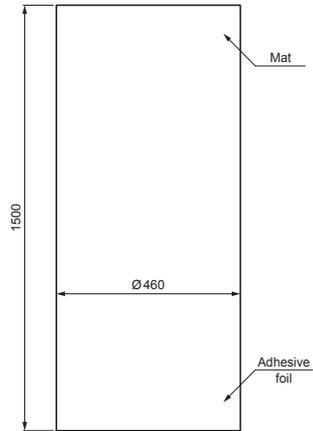

Example of using the METALDREN 450 g roofing foil under the KJG FALZ roof covering.

Polyamide structured separation layer with vapour-permeable foil and self-adhesive foil in the overlap.

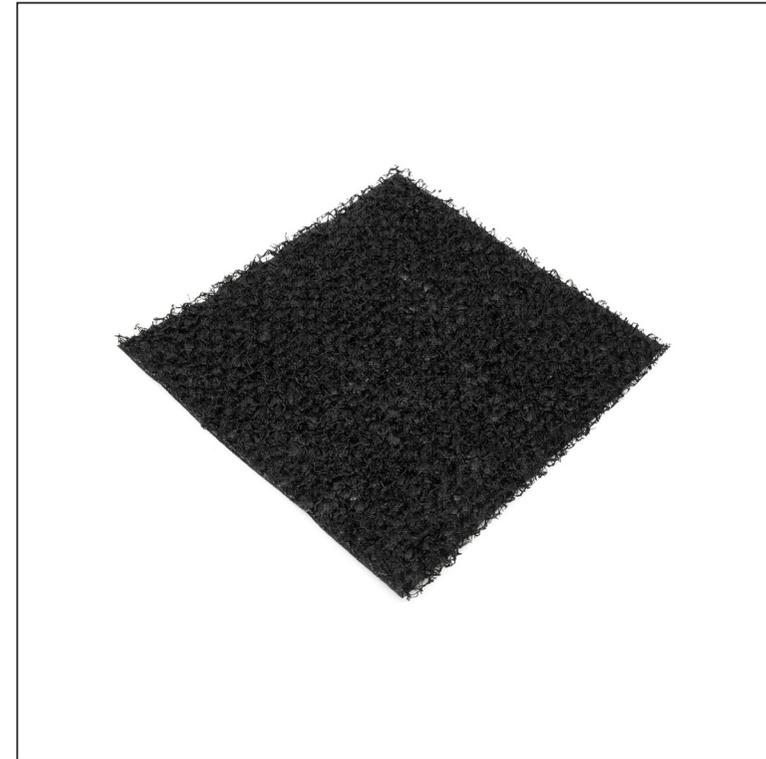

 Polypropylene – laminate + multifilament

Technical parameter	
Roll dimensions	1,5 m x 25 l.m. = 37,5 m ²
Area weight	c.a. 450 g/m ²
Reaction to fire	E
Vapour permeability	3000 g/m ² /24 hod.
Resistance to UV radiation	4 months *
Weight	16,875 kg

* UV stabilization even up to 4 months according to artificial aging carried out in the laboratory relating to the conditions of average sun exposure for the climate of Central Europe

INDEX	CHANGE	DATE	SIGNATURE			
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT				STN STANDARD	SORTING NUMBER	
ELABORATED BY Ing. Kluska M.				NOTE	POSITION NUMBER	
TESTED BY						
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER	
NAME Roof membrane METALDREN 450 g adhesive tape				SD-EUV FOLIA 450GLPM		
				Number of sheets	Sheet 	

Created: 22.04.2026 19:49:15

Technical changes reserved