



TECHNICAL SHEET


ROOF MEMBRANE METALDREN 450 g ADHESIVE TAPE

SD-EUV FOLIA 450GLPM

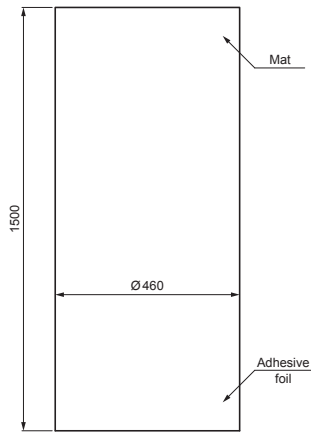

Example of using the METALDREN 450 g roofing foil under the KJG FALZ roof covering.

Polyamide structured separation layer with vapour-permeable foil and self-adhesive foil in the overlap.

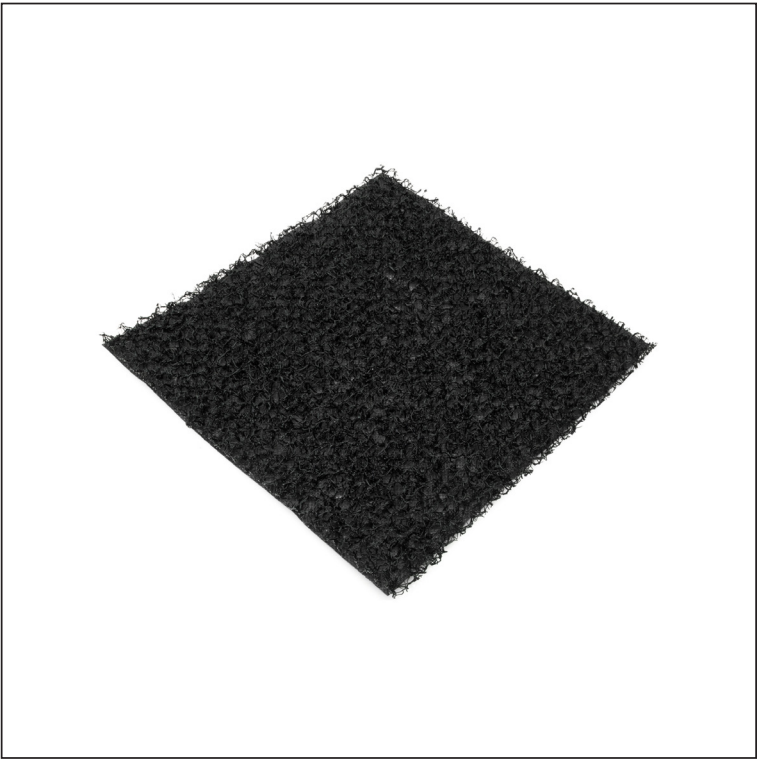

Polypropylene – laminate + multifilament

Technical parameter	
Roll dimensions	1,5 m x 25 l.m. = 37,5 m²
Area weight	c.a. 450 g/m²
Reaction to fire	E
Vapour permeability	3000 g/m²/24 hod.
Resistance to UV radiation	4 months *
Weight	16,875 kg

\* UV stabilization even up to 4 months according to artificial aging carried out in the laboratory relating to the conditions of average sun exposure for the climate of Central Europe

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT			STN STANDARD		SORTING NUMBER
ELABORATED BY Ing. Kluska M.			NOTE		POSITION NUMBER
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST	OLD DRAWING		DRAWING NUMBER
NAME Roof membrane METALDREN 450 g adhesive tape			SD-EUV FOLIA 450GLPM		
			Number of sheets		Sheet