


TECHNICAL SHEET


STRUCTURED MAT 8 mm

SD-EUV FOLIA ROHOZ

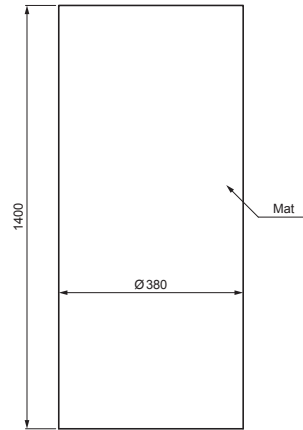

Example of using the structured mat MAT 8 mm under the roof covering KJG FALZ.

Polyamide structured separating layer of 8 mm in thickness.







 Polypropylene – multifilament

Použitie:

The structured mat is placed on large-area dividing layers with a lower structure formed by wooden formwork or wood-based material (e.g. OSB boards). Main use is for sheet metal roofs with a slope between 5° – 20°, or for ventilated roof coverings with a bottom structure made of large-area wood-based boards as well. The structured mat balances out deviations in the flatness of the substructure up to 2 mm and improves the sliding of long roof covering strips. Another positive feature is the improvement of rain-conditioned noise transmission by up to 9 dB.

Technical parameter	
Roll dimensions	1,4 m x 25 l.m. = 35 m ²
Area weight	c.a. 300 g / m ²
Reaction to fire	F
Resistance to UV radiation	4 months *
Weight	10,5 kg

* UV stabilization even up to 4 months according to artificial aging carried out in the laboratory relating to the conditions of average sun exposure for the climate of Central Europe

INDEX	CHANGE	DATE	SIGNATURE			
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS			STN STANDARD		SORTING NUMBER	
AUXILIARY EQUIPMENT			NOTE		POSITION NUMBER	
ELABORATED BY Ing. Kluska M.			TECHNOLOGIST		DRAWING NUMBER	
TESTED BY			OLD DRAWING		DRAWING NUMBER	
NAME			Structured mat 8 mm		Number of sheets SD-EUV FOLIA ROHOZ Sheet 	

Created: 04.06.2026 11:25:51

Technical changes reserved