


TECHNICAL SHEET

POLYETHYLENE TAPE

SD-EUV D-PUR



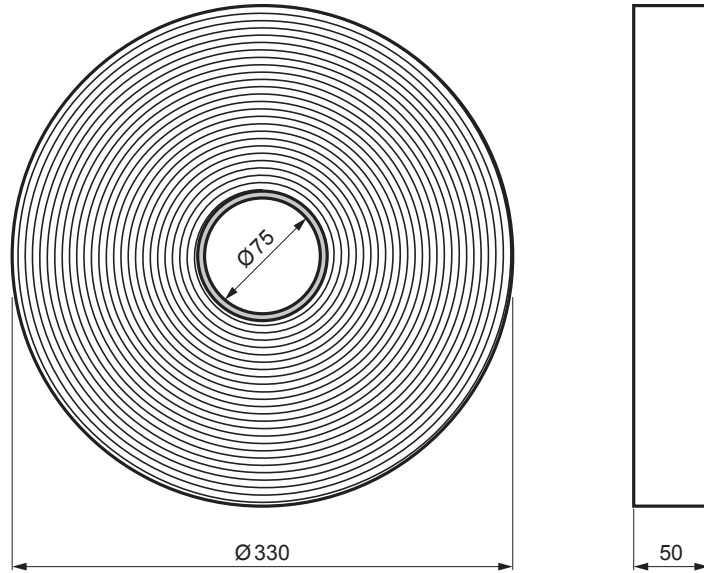


Polyethylene foam

Single-sided polyethylene foam tape with closed cells coated with acrylic dispersion adhesive. Intended for use as a sealing tape in roofing and construction works. The elastic structure makes it possible to level the counter battens mounted on the roof membrane.

| Technical parameter | |
|-----------------------------|-------------------------------|
| Tape dimensions (W x H x D) | 50 mm x 3 ± 0,15 mm x 30 l.m. |
| Density | 30 kg / m ³ |
| Tensile strength | min. 1,4 N / cm |
| UV radiation resistance | 6 months * |
| Temperature when in use | +5 °C up to +25 °C |
| Operating temperature | -30 °C up to +90 °C |
| Weight | 0,25 kg |

* UV stabilization even up to 6 months according to artificial aging carried out in the laboratory relating to the conditions of average sun exposure for the climate of Central Europe

| | | | | | |
|------------------------------|------|-------------|---|---|---|
| INDEX CHANGE | DATE | SIGNATURE |  |  |  |
| | | | | | |
| MATERIAL BRAND | | | STN STANDARD | | |
| SIZE, SEMI-FINISHED PRODUCTS | | | SORTING NUMBER | | |
| AUXILIARY EQUIPMENT | | | POSITION NUMBER | | |
| ELABORATED BY Ing. Kluska M. | | | NOTE | | |
| TESTED BY | | | DRAWING NUMBER | | |
| TECHNOLOGIST | | OLD DRAWING | | DRAWING NUMBER | |
| NAME | | | DRAWING NUMBER | | |
| Polyethylene tape | | | SD-EUV D-PUR | | |
| Number of sheets | | | Sheet | | |

Created: 07.06.2026 13:25:48

Technical changes reserved