


TECHNICAL SHEET

# POLYETHYLENE TAPE

# SD-EUV D-PUR

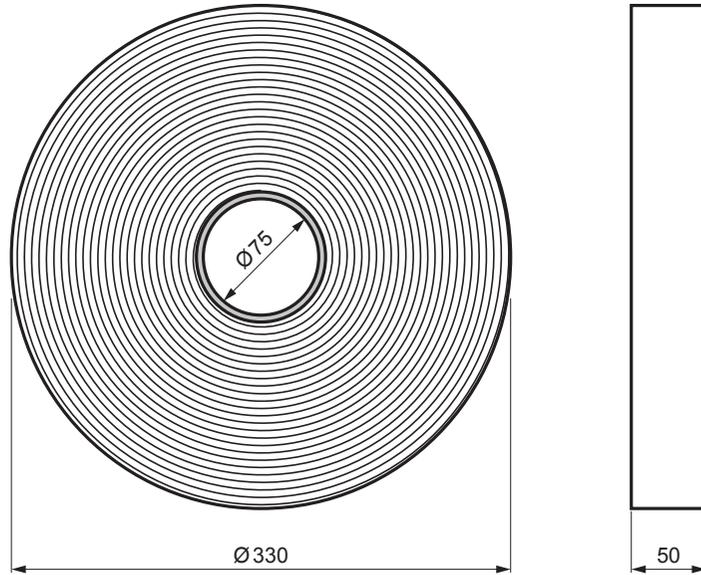

Polyethylene foam

Single-sided polyethylene foam tape with closed cells coated with acrylic dispersion adhesive. Intended for use as a sealing tape in roofing and construction works. The elastic structure makes it possible to level the counter battens mounted on the roof membrane.

Technical parameter	
Tape dimensions (W x H x D)	50 mm x 3 ± 0,15 mm x 30 l.m.
Density	30 kg / m <sup>3</sup>
Tensile strength	min. 1,4 N / cm
UV radiation resistance	6 months *
Temperature when in use	+5 °C up to +25 °C
Operating temperature	-30 °C up to +90 °C
Weight	0,25 kg

\* UV stabilization even up to 6 months according to artificial aging carried out in the laboratory relating to the conditions of average sun exposure for the climate of Central Europe

INDEX CHANGE		DATE	SIGNATURE			
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS						
AUXILIARY EQUIPMENT			STN STANDARD		SORTING NUMBER	
ELABORATED BY Ing. Kluska M.			NOTE		POSITION NUMBER	
TESTED BY						
TECHNOLOGIST		TECHNOLOGIST	OLD DRAWING		DRAWING NUMBER	
NAME			Polyethylene tape		SD-EUV D-PUR	
			Number of sheets		Sheet 	

Created: 21.04.2026 21:07:30

Technical changes reserved