


# TECHNICAL SHEET

## DIFFUSION TAPE




Single-sided tape made of polypropylene non-woven and acrylic dispersion adhesive. Designed for sealing and repairing roof membranes and other construction materials based on polypropylene. The tape protects against the penetration of moisture and wind while maintaining the vapour permeability of the membrane, whose surface breathes.

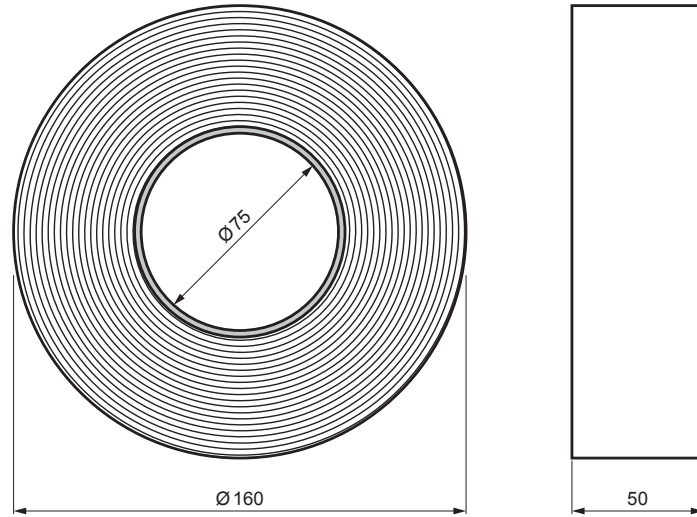


Technical parameter	
Tape dimensions (W x H x D)	50 mm x 0,18 mm adhesive + 0,5 mm non-woven x 25 l.m.
Adhesive weight	230 g/m <sup>2</sup>
Peeling strength	≥ 25 N/25 mm
Shear resistance	250 g/625 mm <sup>2</sup>
Temperature when in use	+5 °C up to +30 °C
Temperature resistance	-40 °C up to +100 °C
UV radiation resistance	4 months *
Weight	0,51 kg

\* UV stabilization even up to 4 months according to artificial aging carried out in the laboratory relating to the conditions of average sun exposure for the climate of Central Europe

# SD-EUV D-TOPBAND



 Non-woven PP, solvent-free acrylic dispersion, EC1 PLUS

INDEX CHANGE		DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS				STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT				NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.					
TESTED BY				OLD DRAWING	DRAWING NUMBER
TECHNOLOGIST		TECHNOLOGIST			
NAME			SD-EUV D-TOPBAND		
Diffusion tape			Number of sheets		Sheet 

Created: 07.06.2026 14:06:42

Technical changes reserved