




TECHNICAL SHEET

CHIMNEY SEALING STRIP

SD-EUV FLEX 3D

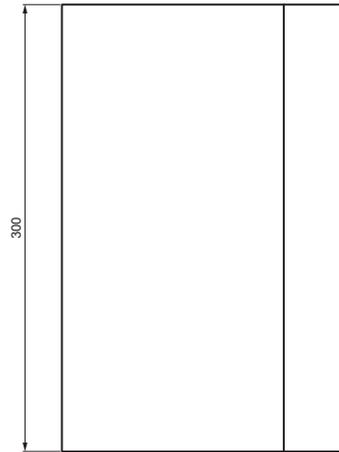

APPLICATION:

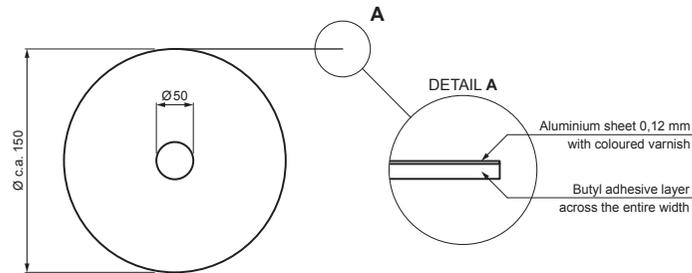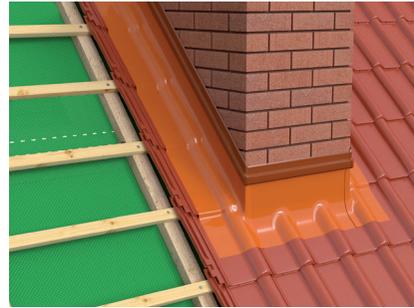

TM Material: Aluminium, butyl
Color : Testa di Moro – RAL 8028

INDEX	CHANGE	DATE	SIGNATURE	  
			W.C.	
MATERIAL BRAND			WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS			STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT			NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.			OLD DRAWING	DRAWING NUMBER
TESTED BY				
TECHNOLOGIST				
NAME				
Chimney sealing strip			Number of sheets	SD-EUV FLEX 3D Sheet 

Created: 20.04.2026 23:26:26

Technical changes reserved

Technical parameter	
Tape size (W x H x D)	300 mm x 0,12 mm x 5 l.m.
Thickness – butyl tape	1,65 ± 0,05 g/cm ²
Resistance against tearing	>25 N/24 mm (35 ± 10)
Heat resistance	-40 °C up to +90 °C
Weight	3,24 kg