




TECHNICAL SHEET

# CHIMNEY SEALING STRIP



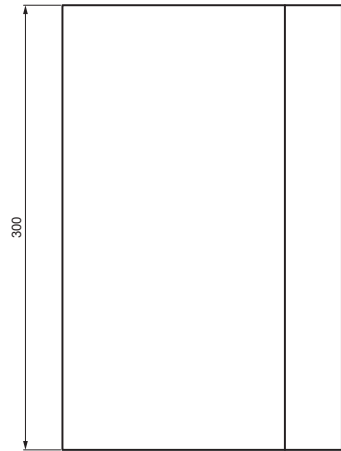

# SD-EUV FLEX 3D

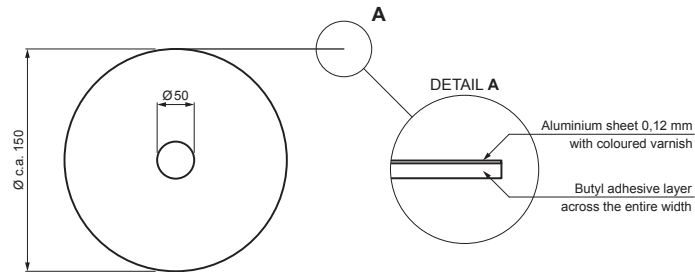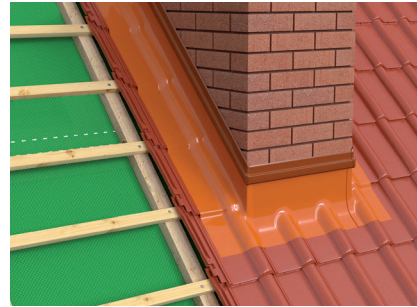

APPLICATION:



**IC** Material: Aluminium, butyl  
Color : Intense black – RAL 9005

INDEX	CHANGE	DATE	SIGNATURE	  	
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS			STN STANDARD		SORTING NUMBER
AUXILIARY EQUIPMENT			NOTE		POSITION NUMBER
ELABORATED BY Ing. Kluska M.					
TESTED BY					
TECHNOLOGIST			TECHNOLOGIST	OLD DRAWING	DRAWING NUMBER
NAME			Chimney sealing strip		Number of sheets
					SD-EUV FLEX 3D
					Sheet 

Created: 06.06.2026 18:17:59

Technical changes reserved

Technical parameter	
Tape size (W x H x D)	300 mm x 0,12 mm x 5 l.m.
Thickness – butyl tape	1,65 ± 0,05 g/cm <sup>2</sup>
Resistance against tearing	>25 N/24 mm (35 ± 10)
Heat resistance	-40 °C up to +90 °C
Weight	3,24 kg