




TECHNICAL SHEET

CHIMNEY SEALING STRIP

SD-EUV FLEX 3D



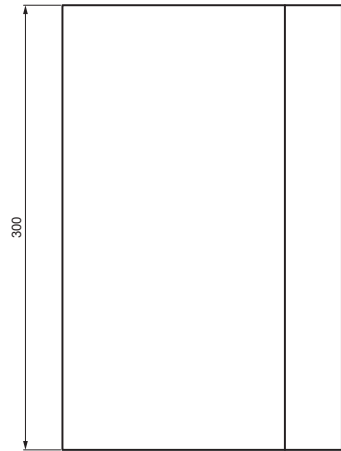

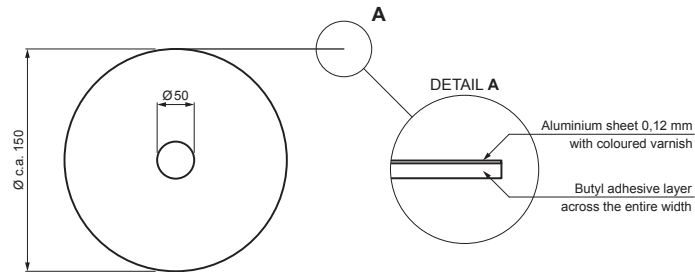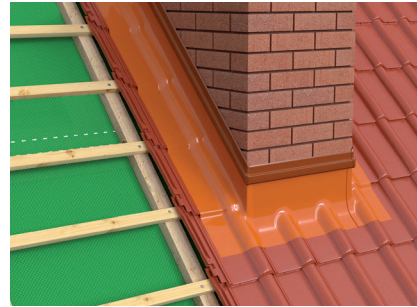

APPLICATION:



IC Material: Aluminium, butyl
Color : Intense black – RAL 9005

Technical parameter	
Tape size (W x H x D)	300 mm x 0,12 mm x 5 l.m.
Thickness – butyl tape	1,65 ± 0,05 g/cm ²
Resistance against tearing	>25 N/24 mm (35 ± 10)
Heat resistance	-40 °C up to +90 °C
Weight	3,24 kg

INDEX	CHANGE	DATE	SIGNATURE			
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS			STN STANDARD		SORTING NUMBER	
AUXILIARY EQUIPMENT			NOTE		POSITION NUMBER	
ELABORATED BY Ing. Kluska M.			OLD DRAWING		DRAWING NUMBER	
TESTED BY			TECHNOLOGIST		DRAWING NUMBER	
NAME			Chimney sealing strip		SD-EUV FLEX 3D	
			Number of sheets		Sheet 	

Created: 06.06.2026 17:59:08

Technical changes reserved