



TECHNICAL SHEET

CHIMNEY SEALING STRIP

SD-EUV FLEX 3D

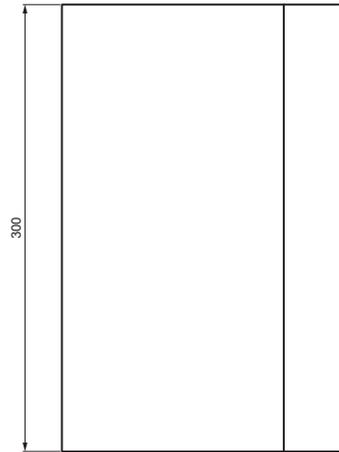

APPLICATION:

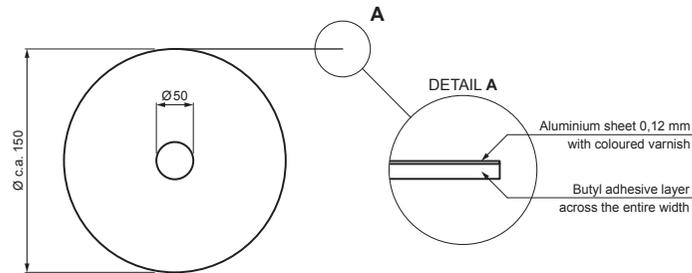

MH Material: Aluminium, butyl
Color : Copper brown – RAL 8004

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS				STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT				NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.					
TESTED BY		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME Chimney sealing strip				Number of sheets	SD-EUV FLEX 3D Sheet 

Created: 06.03.2026 18:02:11

Technical changes reserved

Technical parameter	
Tape size (W x H x D)	300 mm x 0,12 mm x 5 l.m.
Thickness – butyl tape	1,65 ± 0,05 g/cm ²
Resistance against tearing	>25 N/24 mm (35 ± 10)
Heat resistance	-40 °C up to +90 °C
Weight	3,24 kg