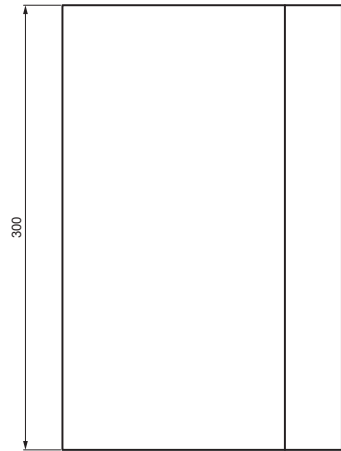


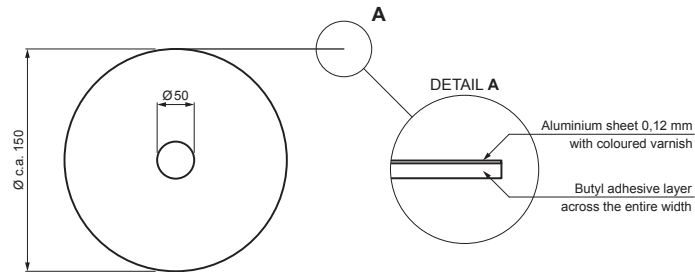
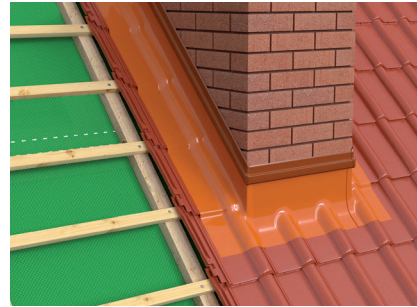
TECHNICAL SHEET

# CHIMNEY SEALING STRIP




# SD-EUV FLEX 3D



**APPLICATION:**



**MH** Material: Aluminium, butyl  
Color : Copper brown – RAL 8004

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS				STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT				NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.					
TESTED BY		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME				SD-EUV FLEX 3D	
Chimney sealing strip				Number of sheets	Sheet 

Created: 06.06.2026 17:15:27

Technical changes reserved

Technical parameter	
Tape size (W x H x D)	300 mm x 0,12 mm x 5 l.m.
Thickness – butyl tape	1,65 ± 0,05 g/cm <sup>2</sup>
Resistance against tearing	>25 N/24 mm (35 ± 10)
Heat resistance	-40 °C up to +90 °C
Weight	3,24 kg