

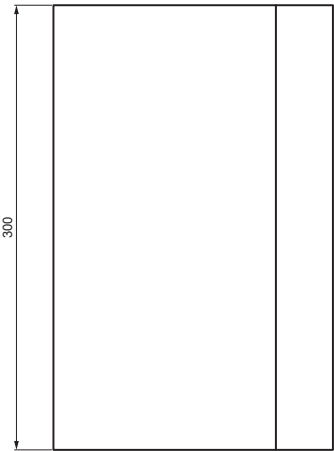


TECHNICAL SHEET

CHIMNEY SEALING STRIP

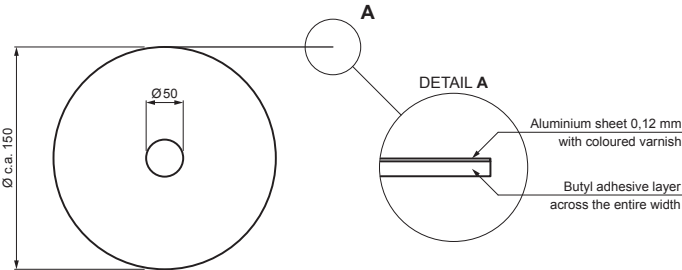

APPLICATION:

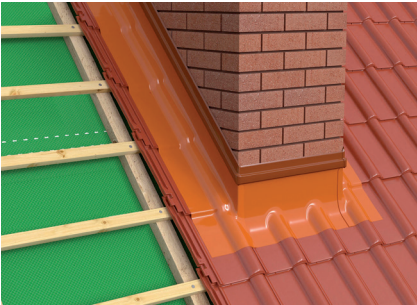

Technical parameter	
Tape size (W x H x D)	300 mm x 0,12 mm x 5 l.m.
Thickness – butyl tape	1,65 ± 0,05 g / cm³
Resistance against tearing	>25 N/24 mm (35 ± 10)
Heat resistance	-40 °C up to +90 °C
Weight	3,24 kg

SD-EUV FLEX 3D



MH Material: Aluminium, butyl
Color : Copper brown – RAL 8004

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS					
AUXILIARY EQUIPMENT			STN STANDARD		SORTING NUMBER
ELABORATED BY Ing. Kluska M.			NOTE		POSITION NUMBER
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST	OLD DRAWING		DRAWING NUMBER
NAME					
Chimney sealing strip			SD-EUV FLEX 3D		
			Number of sheets		Sheet

Created: 20.01.2026 01:29:16

Technical changes reserved