
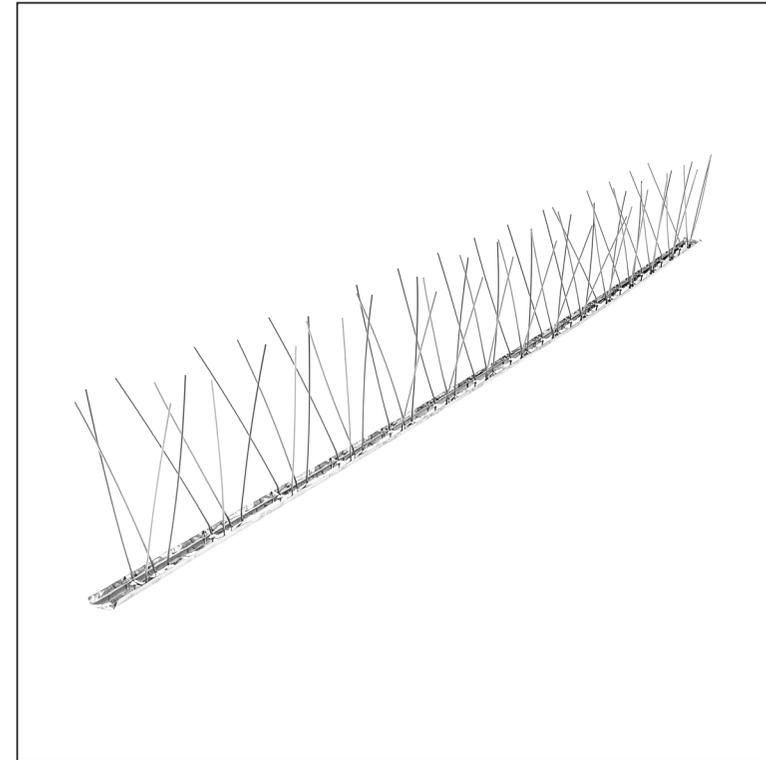


TECHNICAL SHEET

STAINLESS STEEL ANTI-PERCHING BIRD SPIKE SYSTEM

SD-KTUB ART2

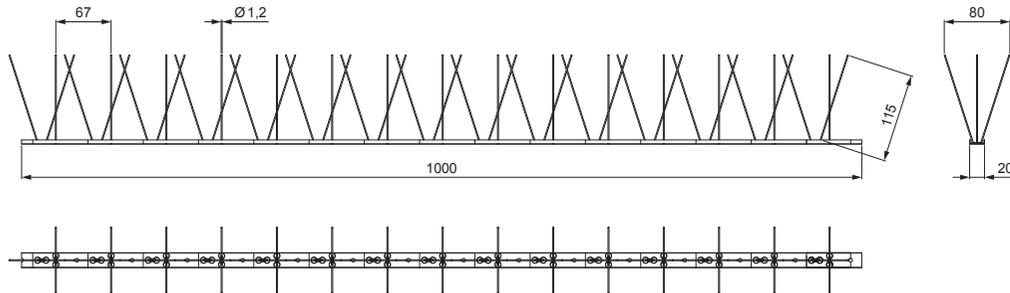

The universal highly effective spike system is suitable for the repressive treatment of cornices and surfaces up to the width of 150 mm, or structural elements up to the width of 170 mm. The spike system is attached to the cleaned surface using silicone adhesive or screws. If necessary, trim to the desired length.

Application:



Technical parameter	
Width of the system itself	80 mm
Spike length	115 mm
Number of spikes per 1 l.m. of the system	80
Effective width of the system	150 mm
Weight	0,175 kg

N Stainless steel

INDEX	CHANGE	DATE	SIGNATURE		
MATERIAL BRAND			W.C.	WEIGHT kg	SCALE
SIZE, SEMI-FINISHED PRODUCTS				STN STANDARD	SORTING NUMBER
AUXILIARY EQUIPMENT				NOTE	POSITION NUMBER
ELABORATED BY Ing. Kluska M.					
TESTED BY					
TECHNOLOGIST		TECHNOLOGIST		OLD DRAWING	DRAWING NUMBER
NAME			Stainless steel anti-perching bird spike system		SD-KTUB ART2
			Number of sheets		Sheet

Created: 02.05.2026 17:20:02

Technical changes reserved