

TECHNICAL SHEET

# SIKA ELASTIC SEALANT

Sikaflex®-11 FC+ is a single-component elastic joint sealant and multi-purpose solvent-free adhesive with a non-drip consistency.

**APPLICATION:**

- for sealing joints in vertical and horizontal structures, as sound insulation of transitions between concrete and flanges, for connections between structures, bonding welds, sealing metal and wooden structures and for sealing air conditioners
- as a multi-purpose adhesive for interior and exterior use, for bonding window sills, door steps, stair treads, cladding boards and prefabricated elements

**PROPERTIES:**



- silicone-free
- very good adhesion to most construction materials
- there is no need to water the bonded parts
- good mechanical resistance
- good weathering resistance
- absorbs impacts and vibrations
- very low emissions

Technical parameter	
Composition	i-Cure polyurethane technology
Hardness according to Shore	~ 37 (after 28 days)
Tensile strength	~ 1,5 N/mm <sup>2</sup>
Tear resistance	~ 8,0 N/mm
Heat resistance	-40 °C to +80 °C
Ambient air temperature	+5 °C up to +40 °C, min. 3 °C above due-point temperature
Substrate temperature	+5 °C to +40 °C
Hardening rate	3,5 mm/24 hours (23 °C/50 % r.v.v.)
Time of skin creation	~ 70 min. (23 °C/50 % r.v.v.)
Storability	15 months in dry, dark areas, at a temperature of +5 °C to +25 °C
Volume	600 ml
Weight	0,765 kg/pcs

# SCH-SIKAFLEX 11FC+



**PS** Dusty grey

INDEX CHANGE	DATE	SIGNATURE		
MATERIAL BRAND		WEIGHT kg	STN STANDARD	
SIZE, SEMI-FINISHED PRODUCTS		NOTE		SORTING NUMBER
AUXILIARY EQUIPMENT		OLD DRAWING		POSITION NUMBER
ELABORATED BY Ing. Kluska M.		DRAWING NUMBER		
TESTED BY		DRAWING NUMBER		
TECHNOLOGIST		DRAWING NUMBER		
NAME		SCH-SIKAFLEX 11FC+		Sheet 
Sika elastic sealant		Number of sheets		

Created: 06.06.2026 17:40:10

Technical changes reserved

TECHNICAL SHEET

# SIKA ELASTIC SEALANT

Sikaflex®-11 FC+ is a single-component elastic joint sealant and multi-purpose solvent-free adhesive with a non-drip consistency.

**APPLICATION:**

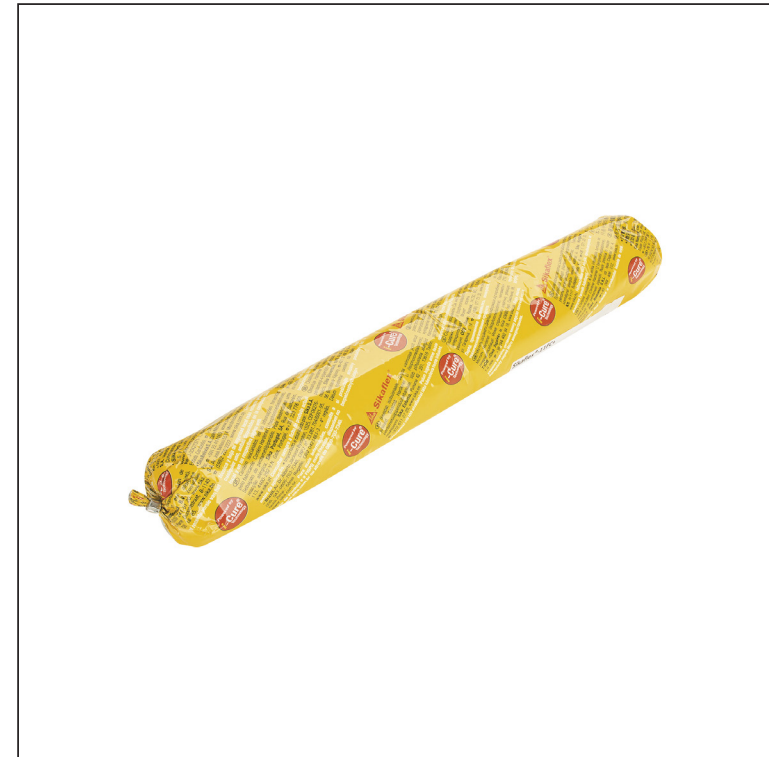
- for sealing joints in vertical and horizontal structures, as sound insulation of transitions between concrete and flanges, for connections between structures, bonding welds, sealing metal and wooden structures and for sealing air conditioners
- as a multi-purpose adhesive for interior and exterior use, for bonding window sills, door steps, stair treads, cladding boards and prefabricated elements

**PROPERTIES:**



- silicone-free
- very good adhesion to most construction materials
- there is no need to water the bonded parts
- good mechanical resistance
- good weathering resistance
- absorbs impacts and vibrations
- very low emissions

Technical parameter	
Composition	i-Cure polyurethane technology
Hardness according to Shore	~ 37 (after 28 days)
Tensile strength	~ 1,5 N/mm <sup>2</sup>
Tear resistance	~ 8,0 N/mm
Heat resistance	-40 °C to +80 °C
Ambient air temperature	+5 °C up to +40 °C, min. 3 °C above due-point temperature
Substrate temperature	+5 °C to +40 °C
Hardening rate	3,5 mm/24 hours (23 °C/50 % r.v.v.)
Time of skin creation	~ 70 min. (23 °C/50 % r.v.v.)
Storability	15 months in dry, dark areas, at a temperature of +5 °C to +25 °C
Volume	600 ml
Weight	0,765 kg/pcs

# SCH-SIKAFLEX 11FC+



**B** White

INDEX CHANGE	DATE	SIGNATURE		
MATERIAL BRAND		WEIGHT kg	SCALE	
SIZE, SEMI-FINISHED PRODUCTS		STN STANDARD	SORTING NUMBER	
AUXILIARY EQUIPMENT		NOTE	POSITION NUMBER	
ELABORATED BY Ing. Kluska M.				
TESTED BY		OLD DRAWING	DRAWING NUMBER	
TECHNOLOGIST				
NAME		Sika elastic sealant SCH-SIKAFLEX 11FC+ Sheet 		
		Number of sheets		

Created: 06.06.2026 17:40:10

Technical changes reserved