


TECHNICAL SHEET

PERKEO CU HAMMER 350 g

KNS-PERKE CU KLAD

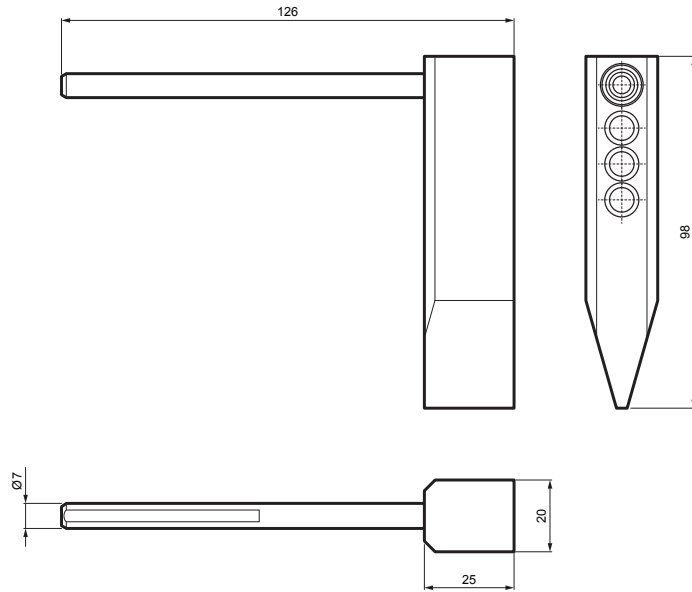

DESCRIPTION:

- **PERKEO** soldering copper hammer weighing 350g with marking **208/2**
- made of cold rolled electrolytic copper
- long service life thanks to high compressed copper
- core drilling holes and bevelled edges on the underside of a copper hammer increase the heating surface. This allows for better distribution of the heat of the burner flame and allows faster warming up
- taking into consideration that cold-rolled electrolytic copper as a basic material, the soldering tips have high thermally conductive and storage capacities
- due to that the tip is heated to working temperature in less than 45 seconds
- the basic material provides maximum heat accumulation, which also means less gas consumption during electricity

APPLICATION:



DETAIL:



M Copper

| | | | | | | | |
|------------------------------|--------|--------------|-----------|-----------------------|-----------------|------------------------|--|
| INDEX | CHANGE | DATE | SIGNATURE | KJG QUALITY | PERKEO | Scan code for 3D model | |
| MATERIAL BRAND | | | W.C. | WEIGHT kg | SCALE | | |
| SIZE, SEMI-FINISHED PRODUCTS | | | | STN STANDARD | SORTING NUMBER | | |
| AUXILIARY EQUIPMENT | | | | NOTE | POSITION NUMBER | | |
| ELABORATED BY Ing. Kluska M. | | | | | | | |
| TESTED BY | | TECHNOLOGIST | | OLD DRAWING | DRAWING NUMBER | | |
| NAME | | | | KNS-PERKE CU KLAD | | | |
| PERKEO CU hammer 350 g | | | | Number of sheets | Sheet | | |

Created: 05.06.2026 17:41:43

Technical changes reserved