
1 2 3 4 5 6 7 8

TECHNICAL SHEET

PERKEO CU-ZINNLUX HAMMER 350 g

KNS-PERKE ZIN KLAD



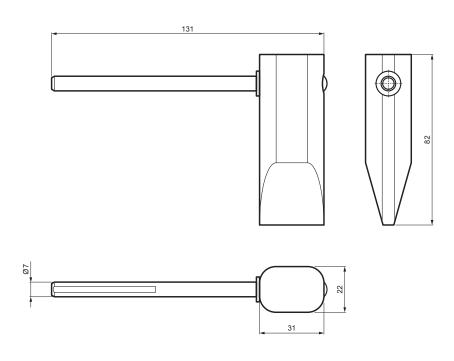

DESCRIPTION:

PERKEO soldering CU-ZINNLUX hammer weighing 350 g with marking **208/2/Z**.

The new **ZINNLUX LONGLIFE** soldering tips are equipped with a special surface that protects the copper core from agressive soldering water and surface deposits. The shape of the soldering tip is thus preserved for at least 2500 soldered metres. A damp cloth is sufficient for cleaning.

High thermal conductivity and accumulation capacity.

The basic material ZINNLUX LONGLIFE consists of cold-rolled electrolytic copper. Thanks to its high thermal conductive and storage capacity, the soldering tip heats up to the working temperature in less than 45 seconds, and in addition, the basic material ensures maximum heat accumulation, which also means less gas consumption during soldering.

CHANGE CHANGE		DATE	SIGNATURE		KJG	PERKEÖÄ		Scan code for 3D model
MATERIAL BRAND W.C.			W.C.	WEIGHT kg			SCALE	
SIZE, SEMI-FINISHED PRODUCTS								
AUXILIARY EQUIPMENT				STN STANDARD		SORTING NUMBER		
ELABORATED BY Ing. Kluska M.				NOTE		POSITION NUMBER		
TESTED BY				1				
TECHNOLOGIST	TECHNOLOG		OLD DRAWING		DRAWING NUMBER			
PERKEO CU-ZINNLUX hammer 350 g				KNS-PERKE ZIN KLAD Number of sheets Sheet				

Created: 04.12.2025 06:08:49

Technical changes reserved

1 2 3 4 5 6 7 8